

2027 SUPPLEMENT



SEA-DOG
MARINE

EXPERIENCE THE SEA-DOG DIFFERENCE

A message from the president

For more than a century, Sea-Dog has earned a respected place in the marine industry through dependable products, trusted service, and lasting value. Today, as we transition from Sea-Dog Line to Sea-Dog Marine, we are entering a new chapter defined by innovation, expanded marine solutions, and an even stronger commitment to our customers' success.

While our name reflects a broader vision for the future, our foundation remains unchanged. The values, relationships, and reputation that have guided Sea-Dog Marine for more than 100 years continue to shape everything we do.

At Sea-Dog Marine, we believe meaningful innovation begins with listening. By understanding the evolving needs of the marine industry and the challenges our customers face, we develop practical, reliable solutions that create real value. Whether enhancing trusted product lines or introducing new technologies and designs, our focus remains the same: helping our customers succeed today and preparing them for tomorrow.

As we grow, we remain committed to the principles that have earned the trust of generations of customers. Consistent quality, competitive value, responsive service, and strong partnerships continue to define the Sea-Dog Marine experience and guide every decision we make.

This year's catalog supplement reflects that commitment. Alongside innovative new products, you will find continued investment in the marine hardware and accessories that have made Sea-Dog Marine a trusted name for generations. Our goal is simple: to expand and strengthen our product offering while maintaining the quality, reliability, and service our customers expect.



Our commitment to our business partners remains equally steadfast. Sea-Dog Marine does not sell directly to the general public. We remain dedicated to an OEM- and distributor-focused business model that supports boat builders, distributors, marinas, boat yards, and retailers. By protecting and strengthening these partnerships, we help our customers compete with confidence while ensuring consumers continue to receive expert service from knowledgeable marine professionals.

Innovation drives our future, but trust remains the foundation of our success. As Sea-Dog Marine continues to evolve, we look forward to creating new opportunities for our customers while staying true to the values and relationships that have brought us here. Thank you for your partnership, your confidence, and your continued support.

Jasper Nysether
President, Sea-Dog Marine

Sea-Dog does not sell to the general public – we only sell to boat builders and wholesalers. For information on how to purchase our products, visit the "Where to Buy" page on our website.



ENGINEERED. TESTED. TRUSTED.

Now joining the Sea-Dog® family of premium LED Navigation Lights, our new Precision-Fold™ C-5 All-Around Folding LED Nav Lights feature an innovative, patent-pending, one-button fold-to-stow design. Engineered to meet ABYC C-5, USCG 72 COLREGS, and IEC 60945 standards, they deliver dependable performance, reliable visibility, and confidence in the most demanding marine environments.



Scan for more info

View all
Sea-Dog®
C-5 Nav
Lights

Sea-Dog® Marine
Proven on the Water

SEA-DOG.COM



LED POP-UP LIGHT - WARM



Investment-Cast 316 Stainless Steel/ABS



Bulk	Display	A	B	C	D	E	Lumens	Volts	Finish	Wt.(lb.)	Std. Pack
n/a	404600-3	2-3/8"	2-5/8"	5"	2-1/2"	2-15/16"	430	12-24	Stainless Steel	.75	1 ea
n/a	404602-3	2-3/8"	2-5/8"	10-1/8"	5-5/8"	2-15/16"	430	12-24	Stainless Steel	2.00	1 ea
404604	n/a	Square Bezel Only (4" X 4")							Stainless Steel	.38	1 ea

LED Pop-Up Lights are available in 2-1/2" and 5-5/8" pop-up heights with a warm illumination, they automatically switch on with a simple twist of the cap, allowing the light to pop-up, ready to use. Push the cap down, twist to lock, and the light switches off and disappears into a table or deck. Can be used with LED Touch Dimmer Switch (403061-1). Cap and bezel constructed of corrosion-resistant, investment-cast 316 stainless steel. Square bezel option also available. Installs with #10 FH fasteners (included). Produces 430 lumens. 12-24VDC. IP67 water resistant rating. CE certified.

⚠WARNING: Cancer and Reproductive Harm - www.P65Warnings.ca.gov



LED POP-UP LIGHT - WARM - RGBW


Investment-Cast 316 Stainless Steel/ABS/Black PVD Coating



Bulk	Display	A	B	C	D	E	Lumens	Volts	Finish	Wt.(lb.)	Std. Pack
n/a	404601-3	2-3/8"	2-5/8"	5"	2-1/2"	2-15/16"	430	12-24	Stainless Steel	.75	1 ea
n/a	404601B-3	2-3/8"	2-5/8"	5"	2-1/2"	2-15/16"	430	12-24	Black PVD	.75	1 ea
n/a	404603-3	2-3/8"	2-5/8"	10-1/8"	5-5/8"	2-15/16"	430	12-24	Stainless Steel	2.00	1 ea
n/a	404603B-3	2-3/8"	2-5/8"	10-1/8"	5-5/8"	2-15/16"	430	12-24	Black PVD	2.00	1 ea
404604	n/a	Square Bezel Only (4" X 4")							Stainless Steel	.38	1 ea
404606	n/a	Square Bezel Only (4" X 4")							Black PVD	.38	1 ea

LED RGBW Pop-Up Lights are available in 2-1/2" and 5-5/8" pop-up heights with a warm illumination, they automatically switch on with a simple twist of the cap, allowing the light to pop-up, ready to use. Push the cap down, twist to lock, and the light switches off and disappears into a table or deck. Can be used with LED Touch Dimmer Switch (403061-1). Cap and bezel constructed of corrosion-resistant, investment-cast 316 stainless steel, also available with durable Black PVD coating. Square bezel options also available. Installs with #10 FH fasteners (included). Produces 430 lumens. 12-24VDC. IP67 water resistant rating. CE certified.

⚠WARNING: Cancer and Reproductive Harm - www.P65Warnings.ca.gov

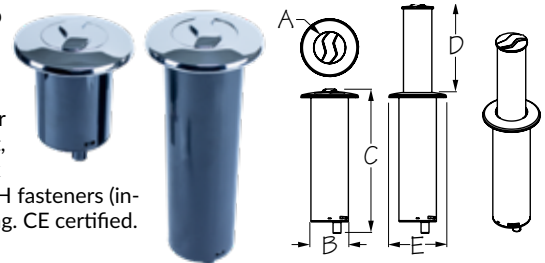

RGBW - LIGHTING CONTROL KIT

Injection-Molded Nylon



Bulk	Display	Description	Wt.(lb.)	Std. Pack
n/a	810000-3	RGBW - Lighting Control Kit (Complete)	2.85	1 ea
810001	n/a	5 Button Controller (Only)	.25	1 ea
810002	n/a	RGBW - Power Module (Only)	1.75	1 ea
810003	n/a	Harness from 5 Button to Module (Only)	.35	1 ea
810004	n/a	Harness from Module to Lights (Only)	.50	1 ea

RGBW - Lighting Control Kit includes 5 Button Controller, RGBW - Power Module and all the necessary connecting harnesses. Works great with our RGBW Pop-up Lights, 404601-3, 404601B-3, 404603-3 and 404603B-3 or with any RGBW capable lights.

⚠WARNING: Cancer and Reproductive Harm - www.P65Warnings.ca.gov

How to Read Sea-Dog Part Numbers

Items with only a 6-digit part number are bulk.

Items available in retail display packaging are identified with a -1, -2, -3, -4, or -6 after the Sea-Dog part number.

No dashBulk

- 1Hanging card, bagged with header card, or in a clamshell
- 2Medium retail pack
- 3Color retail box
- 4Large retail pack
- 6Contractor pack

Introducing Precision-Fold™ C-5 All-Around Nav Lights



PUSH-BUTTON RELEASE


Clutch allows you to easily fold light down horizontally 90° in either direction, or lock at 18° intervals for flexibility and storage while trailering.



ADAPTER PLATE
included to allow
mounting on round rails.



**ABYC C-5/A-16
COMPLIANT**
and designed for use on
T-tops, rails, arches,
hard tops, and
windshield frames.



PRECISION-FOLD™ C-5 ALL-AROUND FOLDING LED NAV LIGHT

Injection-Molded Polycarbonate/Nylon/316 Stainless Steel/Aluminum/Black Anodized Coating


PATENT PENDING IP 66

Bulk	Display	A	B	C	D	Volts	Tube Finish	ABYC C-5/A-16	Wt.(lb.)	Std. Pack
n/a	401032-3	12"	2-3/4"	3-1/2"	1"	12	Stainless Steel	Yes	.35	1 ea
n/a	401033-3	20"	2-3/4"	3-1/2"	1"	12	Stainless Steel	Yes	.45	1 ea
n/a	401034-3	24"	2-3/4"	3-1/2"	1"	12	Stainless Steel	Yes	.50	1 ea
n/a	401041-3	7"	2-3/4"	3-1/2"	1"	12	Black Anodized	Yes	.25	1 ea
n/a	401042-3	12"	2-3/4"	3-1/2"	1"	12	Black Anodized	Yes	.35	1 ea
n/a	401043-3	20"	2-3/4"	3-1/2"	1"	12	Black Anodized	Yes	.45	1 ea
n/a	401044-3	24"	2-3/4"	3-1/2"	1"	12	Black Anodized	Yes	.50	1 ea

Precision-Fold™ C-5 All-Around Folding LED Nav Lights have an innovative push-button clutch mechanism for quick adjustment and storage. Constructed of injection-molded nylon with black anodized aluminum or polished 316 stainless steel tube options. Installs with 2 #10 FH fasteners (included), also includes rail mount adapter for 7/8" to 1" tubing. 12VDC. Low amp draw.

All navigation lights must be mounted properly to provide the correct visual alignment and allow unimpeded sight lines. Please refer to USCG regulations for 1 NM and 2 NM navigation lights for more information. CE, IP66, ABYC C-5/A-16 Compliant.

⚠WARNING: Cancer and Reproductive Harm - www.P65Warnings.ca.gov



PRECISION-FOLD™ C-5 ALL-AROUND FOLDING LED NAV LIGHT - PONTOON

Injection-Molded Polycarbonate/Nylon/316 Stainless Steel/Aluminum/Black Anodized Coating

PATENT PENDING IP 66

Bulk	Display	A	B	C	D	Volts	Tube Finish	ABYC C-5/A-16	Wt.(lb.)	Std. Pack
n/a	401052-3	12"	2-3/4"	3-1/2"	1"	12	Stainless Steel	Yes	.35	1 ea
n/a	401053-3	20"	2-3/4"	3-1/2"	1"	12	Stainless Steel	Yes	.45	1 ea
n/a	401054-3	24"	2-3/4"	3-1/2"	1"	12	Stainless Steel	Yes	.50	1 ea
n/a	401061-3	7"	2-3/4"	3-1/2"	1"	12	Black Anodized	Yes	.25	1 ea
n/a	401062-3	12"	2-3/4"	3-1/2"	1"	12	Black Anodized	Yes	.35	1 ea
n/a	401063-3	20"	2-3/4"	3-1/2"	1"	12	Black Anodized	Yes	.45	1 ea
n/a	401064-3	24"	2-3/4"	3-1/2"	1"	12	Black Anodized	Yes	.50	1 ea

Precision-Fold™ C-5 All-Around Folding LED Nav Lights - Pontoon have an innovative push-button clutch mechanism for quick adjustment and storage. Constructed of injection-molded nylon with black anodized aluminum or polished 316 stainless steel tube options. Installs with 2 #10 FH fasteners (included), also includes rail mount adapter for 7/8" to 1" tubing. 12VDC. Low amp draw.


All navigation lights must be mounted properly to provide the correct visual alignment and allow unimpeded sight lines. Please refer to USCG regulations for 1 NM and 2 NM navigation lights for more information. CE, IP66, ABYC C-5/A-16 Compliant.

⚠WARNING: Cancer and Reproductive Harm - www.P65Warnings.ca.gov



C-5 ALL-AROUND FIXED-MOUNT LED NAV LIGHT

Injection-Molded Polycarbonate/Nylon/316 Stainless Steel/Aluminum/Black Anodized Coating



Bulk	Display	A	B	C	D	Volts	Tube Finish	ABYC C-5/A-16	Wt.(lb.)	Std. Pack
n/a	401010-3	4"	2-3/4"	3-1/2"	1"	12	Black Anodized	Yes	.16	1 ea
n/a	401011-3	7"	2-3/4"	3-1/2"	1"	12	Black Anodized	Yes	.20	1 ea
n/a	401012-3	7"	2-3/4"	3-1/2"	1"	12	Stainless Steel	Yes	.20	1 ea

C-5 All-Around Fixed-Mount LED Nav Lights are constructed of injection-molded nylon with black anodized aluminum or polished 316 stainless steel tube options. Installs with 2 #10 FH fasteners (not included). 12VDC. Low amp draw.


All navigation lights must be mounted properly to provide the correct visual alignment and allow unimpeded sight lines. Please refer to USCG regulations for 1 NM and 2 NM navigation lights for more information. CE, IP66, ABYC C-5/A-16 Compliant.

⚠WARNING: Cancer and Reproductive Harm - www.P65Warnings.ca.gov



C-5 ALL-AROUND TOWER LED NAV LIGHT

Injection-Molded Polycarbonate/Nylon



Bulk	Display	A	B	Wire Length	Volts	Fastener	ABYC C-5/A-16	Wt.(lb.)	Std. Pack
401001	401001-1	1-9/16"	2-3/8"	15-1/2"	12	#10 RH	Yes	.21	1 ea
401001C1	n/a	1-9/16"	2-3/8"	16 Feet	12	#10 RH	Yes	.32	1 ea

C-5 All-Around Tower LED Nav Lights are constructed of UV-stabilized injection-molded polycarbonate and nylon. Installs with two #10 RH fasteners (included). 12VDC. Low amp draw.


All navigation lights must be mounted properly to provide the correct visual alignment and allow unimpeded sight lines. Please refer to USCG regulations for 1 NM and 2 NM navigation lights for more information.

⚠WARNING: Cancer and Reproductive Harm - www.P65Warnings.ca.gov



LED DAY/NIGHT DOME LIGHT - WARM

Stamped 304 Stainless Steel

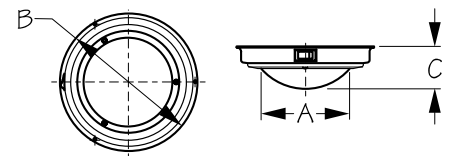

Bulk	Display	A	B	C	Lumens	Volts	Fastener	Wt.(lb.)	Std. Pack
400354	400354-1	4-3/8"	6-5/8"	1-7/8"	268-White/28-Red	12	#6 RH	1.03	1 ea / 5 ea


Warm LED Day/Night Dome Light is prewired with an on/off/on rocker switch and features two separate light circuits. One circuit uses a clear bulb and the other circuit uses a red night vision bulb. With the low current consumption of 0.275 amps @ 12 volts, it gives off very little heat and has extremely long service life. Features 20 white and 10 red LEDs per light. Constructed of corrosion-resistant, stamped 304 stainless steel. Surface mounts with three #6 RH fasteners (not included).

⚠WARNING: Cancer and Reproductive Harm - www.P65Warnings.ca.gov



LED DOME LIGHT - WARM

Stamped 304 Stainless Steel

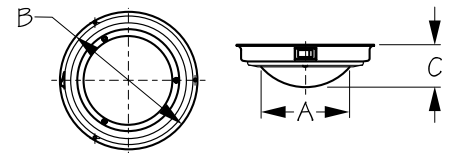


Bulk	Display	A	B	C	Lumens	Volts	Fastener	Wt.(lb.)	Std. Pack
400194	400194-1	3-3/4"	5-1/2"	1-1/2"	268	12	#4 RH	.60	1 ea / 5 ea
400204	400204-1	4-3/8"	6-5/8"	1-7/8"	268	12	#6 RH	.87	1 ea / 5 ea

Warm LED Dome Lights are prewired with an on/off rocker switch. With the low current consumption of 0.275 amps @ 12 volts, it gives off very little heat and has extremely long service life. Features 20 white LEDs per light. Constructed of corrosion-resistant, stamped 304 stainless steel. Surface mounts with three RH fasteners (not included).

⚠WARNING: Cancer and Reproductive Harm - www.P65Warnings.ca.gov



BRIGHTER PERFORMANCE SMARTER TECHNOLOGY



POWER SOCKET


Stamped Brass/Injection-Molded Nylon & ABS



Bulk	Display	A	B	C	Volts	Wt.(lb.)	Std. Pack
426129	n/a	1-7/16"	1-9/16"	1-1/16"	12-24	.08	10 ea

This Power Socket adds power easily almost anywhere. Constructed of injection-molded nylon and ABS with stamped brass contacts. Installation is as easy as drilling a 1-1/8" hole, inserting the socket body, tightening the locking nut, and connecting the wires. Also fits Sea-Dog® Power Socket Shell (426100) and Mounting Bracket (426105). Input 12-24VDC. 16A. IP65 rating.

⚠ WARNING: Cancer and Reproductive Harm - www.P65Warnings.ca.gov

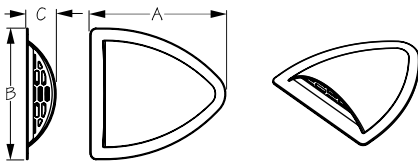

CANVAS VENT

Injection-Molded Nylon



Bulk	Display	A	B	C	Vent Area	Wt.(lb.)	Std. Pack
298000	n/a	5-9/16"	5-1/4"	1-3/16"	1.88 in ²	.05	1 ea

Canvas vents are sewn-in louvered openings installed in marine covers to promote airflow. They are essential for preventing the buildup of trapped moisture, condensation, and mildew under the canvas. Mesh screen design helps prevent bug infiltration.




MADE IN USA

SEA-DOG MARINE WIRE™

BUILT TO ENDURE THE HARSHTEST MARINE ENVIRONMENTS

- Fights corrosion with tinned stranded copper
- Ultra-flexible for vibration-prone environments
- Insulation rated for 600 volts AC/DC
- Withstands extreme temps: -40°C to 105°C
- Saltwater, oil, acid & UV-resistant jacket
- Available in all ABYC-compliant colors, including striped wire
- Proudly made in the USA

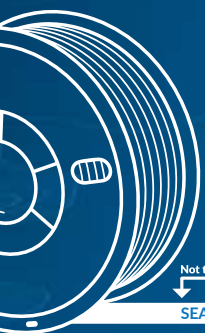

Easy measurement: **SEA-DOG to SEA-DOG = 1 foot**

Not to scale. For illustration only.

SEA-DOG MARINE WIRE™ -- 10 AWG E310352 (UL) BC-5W2 BOAT CABLE 600V 105C (75 WET) OIL RESISTANT VW-1 - MADE IN USA

SEA-DOG MARINE WIRE™

DID YOU KNOW?
The longer your wire, the greater the voltage drop. Use the correct wire gauge to ensure proper voltage.



SEA-DOG MARINE WIRE™ PRIMARY WIRE

Tinned Copper Stranded Wire



6
AWG

Bulk	Display	Description	AWG	Color	Length in Feet	Wt.(lb.)	Std. Pack
8006010	n/a	Primary Wire	6	Black	25	3.01	1 spool
8006011	n/a	Primary Wire	6	Black	50	6.02	1 spool
8006012	n/a	Primary Wire	6	Black	100	12.04	1 spool
8006014	n/a	Primary Wire	6	Black	250	30.10	1 spool
8006017	n/a	Primary Wire	6	Black	500	60.20	1 spool
8006019	n/a	Primary Wire	6	Black	1000	120.00	1 spool
8006020	n/a	Primary Wire	6	Red	25	3.01	1 spool
8006021	n/a	Primary Wire	6	Red	50	6.02	1 spool
8006022	n/a	Primary Wire	6	Red	100	12.04	1 spool
8006024	n/a	Primary Wire	6	Red	250	30.10	1 spool
8006027	n/a	Primary Wire	6	Red	500	60.20	1 spool
8006030	n/a	Primary Wire	6	Yellow	25	3.01	1 spool
8006031	n/a	Primary Wire	6	Yellow	50	6.02	1 spool
8006032	n/a	Primary Wire	6	Yellow	100	12.04	1 spool
8006034	n/a	Primary Wire	6	Yellow	250	30.10	1 spool
8006037	n/a	Primary Wire	6	Yellow	500	60.20	1 spool
8006040	n/a	Primary Wire	6	Green	25	3.01	1 spool
8006041	n/a	Primary Wire	6	Green	50	6.02	1 spool
8006042	n/a	Primary Wire	6	Green	100	12.04	1 spool
8006044	n/a	Primary Wire	6	Green	250	30.10	1 spool
8006047	n/a	Primary Wire	6	Green	500	60.20	1 spool
8006050	n/a	Primary Wire	6	White	25	3.01	1 spool
8006051	n/a	Primary Wire	6	White	50	6.02	1 spool

SEA-DOG MARINE WIRE™ PRIMARY WIRE CONTINUED

Bulk	Display	Description	AWG	Color	Length in Feet	Wt.(lb.)	Std. Pack
8006052	n/a	Primary Wire	6	White	100	12.04	1 spool
8006054	n/a	Primary Wire	6	White	250	30.10	1 spool
8006057	n/a	Primary Wire	6	White	500	60.20	1 spool
8008010	n/a	Primary Wire	8	Black	25	1.84	1 spool
8008011	n/a	Primary Wire	8	Black	50	3.69	1 spool
8008012	n/a	Primary Wire	8	Black	100	7.37	1 spool
8008014	n/a	Primary Wire	8	Black	250	18.43	1 spool
8008017	n/a	Primary Wire	8	Black	500	36.85	1 spool
8008019	n/a	Primary Wire	8	Black	1000	73.70	1 spool
8008020	n/a	Primary Wire	8	Red	25	1.84	1 spool
8008021	n/a	Primary Wire	8	Red	50	3.69	1 spool
8008022	n/a	Primary Wire	8	Red	100	7.37	1 spool
8008024	n/a	Primary Wire	8	Red	250	18.43	1 spool
8008027	n/a	Primary Wire	8	Red	500	36.85	1 spool
8008029	n/a	Primary Wire	8	Red	1000	73.70	1 spool
8008030	n/a	Primary Wire	8	Yellow	25	1.84	1 spool
8008031	n/a	Primary Wire	8	Yellow	50	3.69	1 spool
8008032	n/a	Primary Wire	8	Yellow	100	7.37	1 spool
8008034	n/a	Primary Wire	8	Yellow	250	18.43	1 spool
8008037	n/a	Primary Wire	8	Yellow	500	36.85	1 spool
8008039	n/a	Primary Wire	8	Yellow	1000	73.70	1 spool
8008040	n/a	Primary Wire	8	Green	25	1.84	1 spool
8008041	n/a	Primary Wire	8	Green	50	3.69	1 spool
8008042	n/a	Primary Wire	8	Green	100	7.37	1 spool
8008044	n/a	Primary Wire	8	Green	250	18.43	1 spool
8008047	n/a	Primary Wire	8	Green	500	36.85	1 spool
8008049	n/a	Primary Wire	8	Green	1000	73.70	1 spool
8008050	n/a	Primary Wire	8	White	25	1.84	1 spool
8008051	n/a	Primary Wire	8	White	50	3.69	1 spool
8008052	n/a	Primary Wire	8	White	100	7.37	1 spool
8008054	n/a	Primary Wire	8	White	250	18.43	1 spool
8008057	n/a	Primary Wire	8	White	500	36.85	1 spool
8008059	n/a	Primary Wire	8	White	1000	73.70	1 spool
8010010	n/a	Primary Wire	10	Black	25	1.06	1 spool
8010012	n/a	Primary Wire	10	Black	100	4.25	1 spool
8010014	n/a	Primary Wire	10	Black	250	10.63	1 spool
8010017	n/a	Primary Wire	10	Black	500	21.25	1 spool
8010019	n/a	Primary Wire	10	Black	1000	42.50	1 spool
8010020	n/a	Primary Wire	10	Red	25	1.06	1 spool
8010022	n/a	Primary Wire	10	Red	100	4.25	1 spool
8010024	n/a	Primary Wire	10	Red	250	10.63	1 spool
8010027	n/a	Primary Wire	10	Red	500	21.25	1 spool
8010029	n/a	Primary Wire	10	Red	1000	42.50	1 spool
8010030	n/a	Primary Wire	10	Yellow	25	1.06	1 spool
8010032	n/a	Primary Wire	10	Yellow	100	4.25	1 spool
8010034	n/a	Primary Wire	10	Yellow	250	10.63	1 spool
8010037	n/a	Primary Wire	10	Yellow	500	21.25	1 spool
8010039	n/a	Primary Wire	10	Yellow	1000	42.50	1 spool
8010040	n/a	Primary Wire	10	Green	25	1.06	1 spool
8010042	n/a	Primary Wire	10	Green	100	4.25	1 spool
8010044	n/a	Primary Wire	10	Green	250	10.63	1 spool
8010047	n/a	Primary Wire	10	Green	500	21.25	1 spool
8010049	n/a	Primary Wire	10	Green	1000	42.50	1 spool
8010050	n/a	Primary Wire	10	White	25	1.06	1 spool
8010052	n/a	Primary Wire	10	White	100	4.25	1 spool
8010054	n/a	Primary Wire	10	White	250	10.63	1 spool
8010057	n/a	Primary Wire	10	White	500	21.25	1 spool
8010059	n/a	Primary Wire	10	White	1000	42.50	1 spool
8010060	n/a	Primary Wire	10	Blue	25	1.06	1 spool
8010062	n/a	Primary Wire	10	Blue	100	4.25	1 spool
8010064	n/a	Primary Wire	10	Blue	250	10.63	1 spool
8010067	n/a	Primary Wire	10	Blue	500	21.25	1 spool
8010069	n/a	Primary Wire	10	Blue	1000	42.50	1 spool
8010070	n/a	Primary Wire	10	Brown	25	1.06	1 spool



6
AWG

8
AWG

10
AWG

10 AWG
CONTINUES ON
NEXT PAGE



10
AWG

SEA-DOG MARINE WIRE™ PRIMARY WIRE CONTINUED

Bulk	Display	Description	AWG	Color	Length in Feet	Wt.(lb.)	Std. Pack
8010072	n/a	Primary Wire	10	Brown	100	4.25	1 spool
8010074	n/a	Primary Wire	10	Brown	250	10.63	1 spool
8010077	n/a	Primary Wire	10	Brown	500	21.25	1 spool
8010079	n/a	Primary Wire	10	Brown	1000	42.50	1 spool
8010080	n/a	Primary Wire	10	Orange	25	1.06	1 spool
8010082	n/a	Primary Wire	10	Orange	100	4.25	1 spool
8010084	n/a	Primary Wire	10	Orange	250	10.63	1 spool
8010087	n/a	Primary Wire	10	Orange	500	21.25	1 spool
8010089	n/a	Primary Wire	10	Orange	1000	42.50	1 spool
8010119	n/a	Primary Wire	10	Gray	1000	42.50	1 spool
8010140	n/a	Primary Wire	10	Green/Yellow	25	1.06	1 spool
8010142	n/a	Primary Wire	10	Green/Yellow	100	4.25	1 spool
8010144	n/a	Primary Wire	10	Green/Yellow	250	10.63	1 spool
8010147	n/a	Primary Wire	10	Green/Yellow	500	21.25	1 spool
8010149	n/a	Primary Wire	10	Green/Yellow	1000	42.50	1 spool
8012010	n/a	Primary Wire	12	Black	25	.71	1 spool
8012012	n/a	Primary Wire	12	Black	100	2.83	1 spool
8012014	n/a	Primary Wire	12	Black	250	7.08	1 spool
8012016	n/a	Primary Wire	12	Black	400	11.32	1 spool
8012019	n/a	Primary Wire	12	Black	1000	28.30	1 spool
8012020	n/a	Primary Wire	12	Red	25	.71	1 spool
8012022	n/a	Primary Wire	12	Red	100	2.83	1 spool
8012024	n/a	Primary Wire	12	Red	250	7.08	1 spool
8012026	n/a	Primary Wire	12	Red	400	11.32	1 spool
8012029	n/a	Primary Wire	12	Red	1000	28.30	1 spool
8012030	n/a	Primary Wire	12	Yellow	25	.71	1 spool
8012032	n/a	Primary Wire	12	Yellow	100	2.83	1 spool
8012034	n/a	Primary Wire	12	Yellow	250	7.08	1 spool
8012036	n/a	Primary Wire	12	Yellow	400	11.32	1 spool
8012039	n/a	Primary Wire	12	Yellow	1000	28.30	1 spool
8012040	n/a	Primary Wire	12	Green	25	.71	1 spool
8012042	n/a	Primary Wire	12	Green	100	2.83	1 spool
8012044	n/a	Primary Wire	12	Green	250	7.09	1 spool
8012046	n/a	Primary Wire	12	Green	400	11.32	1 spool
8012049	n/a	Primary Wire	12	Green	1000	28.30	1 spool
8012050	n/a	Primary Wire	12	White	25	.71	1 spool
8012052	n/a	Primary Wire	12	White	100	2.83	1 spool
8012054	n/a	Primary Wire	12	White	250	7.09	1 spool
8012056	n/a	Primary Wire	12	White	400	11.32	1 spool
8012059	n/a	Primary Wire	12	White	1000	28.30	1 spool
8012060	n/a	Primary Wire	12	Blue	25	.71	1 spool
8012062	n/a	Primary Wire	12	Blue	100	2.83	1 spool
8012064	n/a	Primary Wire	12	Blue	250	7.09	1 spool
8012066	n/a	Primary Wire	12	Blue	400	11.32	1 spool
8012069	n/a	Primary Wire	12	Blue	1000	28.30	1 spool
8012070	n/a	Primary Wire	12	Brown	25	.71	1 spool
8012072	n/a	Primary Wire	12	Brown	100	2.83	1 spool
8012074	n/a	Primary Wire	12	Brown	250	7.09	1 spool
8012076	n/a	Primary Wire	12	Brown	400	11.32	1 spool
8012079	n/a	Primary Wire	12	Brown	1000	28.30	1 spool
8012080	n/a	Primary Wire	12	Orange	25	.71	1 spool
8012082	n/a	Primary Wire	12	Orange	100	2.83	1 spool
8012084	n/a	Primary Wire	12	Orange	250	7.09	1 spool
8012086	n/a	Primary Wire	12	Orange	400	11.32	1 spool
8012089	n/a	Primary Wire	12	Orange	1000	28.30	1 spool
8012090	n/a	Primary Wire	12	Pink	25	.71	1 spool
8012092	n/a	Primary Wire	12	Pink	100	2.83	1 spool
8012094	n/a	Primary Wire	12	Pink	250	7.09	1 spool
8012096	n/a	Primary Wire	12	Pink	400	11.32	1 spool
8012100	n/a	Primary Wire	12	Purple	25	.71	1 spool
8012102	n/a	Primary Wire	12	Purple	100	2.83	1 spool
8012104	n/a	Primary Wire	12	Purple	250	7.09	1 spool
8012106	n/a	Primary Wire	12	Purple	400	11.32	1 spool
8012112	n/a	Primary Wire	12	Gray	100	2.83	1 spool

12
AWG

SEA-DOG MARINE WIRE™ PRIMARY WIRE CONTINUED

Bulk	Display	Description	AWG	Color	Length in Feet	Wt.(lb.)	Std. Pack
8012119	n/a	Primary Wire	12	Gray	1000	28.30	1 spool
8012122	n/a	Primary Wire	12	Tan	100	2.83	1 spool
8012124	n/a	Primary Wire	12	Tan	250	7.09	1 spool
8012126	n/a	Primary Wire	12	Tan	400	11.32	1 spool
8012140	n/a	Primary Wire	12	Green/Yellow	25	.71	1 spool
8014010	n/a	Primary Wire	14	Black	25	.49	1 spool
8014012	n/a	Primary Wire	14	Black	100	1.96	1 spool
8014014	n/a	Primary Wire	14	Black	250	4.90	1 spool
8014017	n/a	Primary Wire	14	Black	500	9.80	1 spool
8014019	n/a	Primary Wire	14	Black	1000	19.60	1 spool
8014020	n/a	Primary Wire	14	Red	25	.49	1 spool
8014022	n/a	Primary Wire	14	Red	100	1.96	1 spool
8014024	n/a	Primary Wire	14	Red	250	4.90	1 spool
8014027	n/a	Primary Wire	14	Red	500	9.80	1 spool
8014029	n/a	Primary Wire	14	Red	1000	19.60	1 spool
8014030	n/a	Primary Wire	14	Yellow	25	.49	1 spool
8014032	n/a	Primary Wire	14	Yellow	100	1.96	1 spool
8014034	n/a	Primary Wire	14	Yellow	250	4.90	1 spool
8014037	n/a	Primary Wire	14	Yellow	500	9.80	1 spool
8014039	n/a	Primary Wire	14	Yellow	1000	19.60	1 spool
8014040	n/a	Primary Wire	14	Green	25	.49	1 spool
8014042	n/a	Primary Wire	14	Green	100	1.96	1 spool
8014044	n/a	Primary Wire	14	Green	250	4.90	1 spool
8014047	n/a	Primary Wire	14	Green	500	9.80	1 spool
8014049	n/a	Primary Wire	14	Green	1000	19.60	1 spool
8014050	n/a	Primary Wire	14	White	25	.49	1 spool
8014052	n/a	Primary Wire	14	White	100	1.96	1 spool
8014054	n/a	Primary Wire	14	White	250	4.90	1 spool
8014057	n/a	Primary Wire	14	White	500	9.80	1 spool
8014059	n/a	Primary Wire	14	White	1000	19.60	1 spool
8014060	n/a	Primary Wire	14	Blue	25	.49	1 spool
8014062	n/a	Primary Wire	14	Blue	100	1.96	1 spool
8014064	n/a	Primary Wire	14	Blue	250	4.90	1 spool
8014067	n/a	Primary Wire	14	Blue	500	9.80	1 spool
8014070	n/a	Primary Wire	14	Brown	25	.49	1 spool
8014072	n/a	Primary Wire	14	Brown	100	1.96	1 spool
8014074	n/a	Primary Wire	14	Brown	250	4.90	1 spool
8014077	n/a	Primary Wire	14	Brown	500	9.80	1 spool
8014079	n/a	Primary Wire	14	Brown	1000	19.60	1 spool
8014080	n/a	Primary Wire	14	Orange	25	.49	1 spool
8014082	n/a	Primary Wire	14	Orange	100	1.96	1 spool
8014084	n/a	Primary Wire	14	Orange	250	4.90	1 spool
8014087	n/a	Primary Wire	14	Orange	500	9.80	1 spool
8014089	n/a	Primary Wire	14	Orange	1000	19.60	1 spool
8014090	n/a	Primary Wire	14	Pink	25	.49	1 spool
8014092	n/a	Primary Wire	14	Pink	100	1.96	1 spool
8014094	n/a	Primary Wire	14	Pink	250	4.90	1 spool
8014097	n/a	Primary Wire	14	Pink	500	9.80	1 spool
8014100	n/a	Primary Wire	14	Purple	25	.49	1 spool
8014102	n/a	Primary Wire	14	Purple	100	1.96	1 spool
8014104	n/a	Primary Wire	14	Purple	250	4.90	1 spool
8014107	n/a	Primary Wire	14	Purple	500	9.80	1 spool
8014109	n/a	Primary Wire	14	Purple	1000	19.60	1 spool
8014110	n/a	Primary Wire	14	Gray	25	.49	1 spool
8014112	n/a	Primary Wire	14	Gray	100	1.96	1 spool
8014114	n/a	Primary Wire	14	Gray	250	4.90	1 spool
8014117	n/a	Primary Wire	14	Gray	500	9.80	1 spool
8014119	n/a	Primary Wire	14	Gray	1000	19.60	1 spool
8014120	n/a	Primary Wire	14	Tan	25	.49	1 spool
8014122	n/a	Primary Wire	14	Tan	100	1.96	1 spool
8014123	n/a	Primary Wire	14	Tan	250	4.90	1 spool
8014127	n/a	Primary Wire	14	Tan	500	9.80	1 spool
8014132	n/a	Primary Wire	14	Light Blue	100	1.96	1 spool
8014134	n/a	Primary Wire	14	Light Blue	250	4.90	1 spool



12
AWG

14
AWG

14 AWG
CONTINUES ON
NEXT PAGE

14
AWG


SEA-DOG MARINE WIRE™ PRIMARY WIRE CONTINUED

Bulk	Display	Description	AWG	Color	Length in Feet	Wt.(lb.)	Std. Pack
8014137	n/a	Primary Wire	14	Light Blue	500	9.80	1 spool
8014140	n/a	Primary Wire	14	Green/Yellow	25	.49	1 spool
8016010	n/a	Primary Wire	16	Black	25	.36	1 spool
8016012	n/a	Primary Wire	16	Black	100	1.44	1 spool
8016014	n/a	Primary Wire	16	Black	250	3.60	1 spool
8016017	n/a	Primary Wire	16	Black	500	7.20	1 spool
8016019	n/a	Primary Wire	16	Black	1000	14.40	1 spool
8016020	n/a	Primary Wire	16	Red	25	.36	1 spool
8016022	n/a	Primary Wire	16	Red	100	1.44	1 spool
8016024	n/a	Primary Wire	16	Red	250	3.60	1 spool
8016027	n/a	Primary Wire	16	Red	500	7.20	1 spool
8016029	n/a	Primary Wire	16	Red	1000	14.40	1 spool
8016030	n/a	Primary Wire	16	Yellow	25	.36	1 spool
8016032	n/a	Primary Wire	16	Yellow	100	1.44	1 spool
8016034	n/a	Primary Wire	16	Yellow	250	3.60	1 spool
8016037	n/a	Primary Wire	16	Yellow	500	7.20	1 spool
8016039	n/a	Primary Wire	16	Yellow	1000	14.40	1 spool
8016040	n/a	Primary Wire	16	Green	25	.36	1 spool
8016042	n/a	Primary Wire	16	Green	100	1.44	1 spool
8016044	n/a	Primary Wire	16	Green	250	3.60	1 spool
8016047	n/a	Primary Wire	16	Green	500	7.20	1 spool
8016049	n/a	Primary Wire	16	Green	1000	14.40	1 spool
8016050	n/a	Primary Wire	16	White	25	.36	1 spool
8016052	n/a	Primary Wire	16	White	100	1.44	1 spool
8016054	n/a	Primary Wire	16	White	250	3.60	1 spool
8016057	n/a	Primary Wire	16	White	500	7.20	1 spool
8016059	n/a	Primary Wire	16	White	1000	14.40	1 spool
8016060	n/a	Primary Wire	16	Blue	25	.36	1 spool
8016062	n/a	Primary Wire	16	Blue	100	1.44	1 spool
8016064	n/a	Primary Wire	16	Blue	250	3.60	1 spool
8016067	n/a	Primary Wire	16	Blue	500	7.20	1 spool
8016069	n/a	Primary Wire	16	Blue	1000	14.40	1 spool
8016070	n/a	Primary Wire	16	Brown	25	.36	1 spool
8016072	n/a	Primary Wire	16	Brown	100	1.44	1 spool
8016074	n/a	Primary Wire	16	Brown	250	3.60	1 spool
8016077	n/a	Primary Wire	16	Brown	500	7.20	1 spool
8016079	n/a	Primary Wire	16	Brown	1000	14.40	1 spool
8016080	n/a	Primary Wire	16	Orange	25	.36	1 spool
8016082	n/a	Primary Wire	16	Orange	100	1.44	1 spool
8016084	n/a	Primary Wire	16	Orange	250	3.60	1 spool
8016087	n/a	Primary Wire	16	Orange	500	7.20	1 spool
8016089	n/a	Primary Wire	16	Orange	1000	14.40	1 spool
8016090	n/a	Primary Wire	16	Pink	25	.36	1 spool
8016092	n/a	Primary Wire	16	Pink	100	1.44	1 spool
8016094	n/a	Primary Wire	16	Pink	250	3.60	1 spool
8016097	n/a	Primary Wire	16	Pink	500	7.20	1 spool
8016100	n/a	Primary Wire	16	Purple	25	.36	1 spool
8016102	n/a	Primary Wire	16	Purple	100	1.44	1 spool
8016104	n/a	Primary Wire	16	Purple	250	3.60	1 spool
8016107	n/a	Primary Wire	16	Purple	500	7.20	1 spool
8016109	n/a	Primary Wire	16	Purple	1000	14.40	1 spool
8016110	n/a	Primary Wire	16	Gray	25	.36	1 spool
8016112	n/a	Primary Wire	16	Gray	100	1.44	1 spool
8016114	n/a	Primary Wire	16	Gray	250	3.60	1 spool
8016117	n/a	Primary Wire	16	Gray	500	7.20	1 spool
8016119	n/a	Primary Wire	16	Gray	1000	14.40	1 spool
8016120	n/a	Primary Wire	16	Tan	25	.36	1 spool
8016122	n/a	Primary Wire	16	Tan	100	1.44	1 spool
8016124	n/a	Primary Wire	16	Tan	250	3.60	1 spool
8016127	n/a	Primary Wire	16	Tan	500	7.20	1 spool
8016132	n/a	Primary Wire	16	Light Blue	100	1.44	1 spool
8016137	n/a	Primary Wire	16	Light Blue	500	7.20	1 spool
8016140	n/a	Primary Wire	16	Green/Yellow	25	.36	1 spool

16
AWG

SEA-DOG MARINE WIRE™ PRIMARY WIRE CONTINUED

Bulk	Display	Description	AWG	Color	Length in Feet	Wt.(lb.)	Std. Pack
8018010	n/a	Primary Wire	18	Black	25	.28	1 spool
8018012	n/a	Primary Wire	18	Black	100	1.12	1 spool
8018014	n/a	Primary Wire	18	Black	250	2.80	1 spool
8018017	n/a	Primary Wire	18	Black	500	5.60	1 spool
8018019	n/a	Primary Wire	18	Black	1000	11.20	1 spool
8018020	n/a	Primary Wire	18	Red	25	.28	1 spool
8018022	n/a	Primary Wire	18	Red	100	1.12	1 spool
8018024	n/a	Primary Wire	18	Red	250	2.80	1 spool
8018027	n/a	Primary Wire	18	Red	500	5.60	1 spool
8018029	n/a	Primary Wire	18	Red	1000	11.20	1 spool
8018030	n/a	Primary Wire	18	Yellow	25	.28	1 spool
8018032	n/a	Primary Wire	18	Yellow	100	1.12	1 spool
8018034	n/a	Primary Wire	18	Yellow	250	2.80	1 spool
8018037	n/a	Primary Wire	18	Yellow	500	5.60	1 spool
8018039	n/a	Primary Wire	18	Yellow	1000	11.20	1 spool
8018040	n/a	Primary Wire	18	Green	25	.28	1 spool
8018042	n/a	Primary Wire	18	Green	100	1.12	1 spool
8018044	n/a	Primary Wire	18	Green	250	2.80	1 spool
8018047	n/a	Primary Wire	18	Green	500	5.60	1 spool
8018049	n/a	Primary Wire	18	Green	1000	11.20	1 spool
8018050	n/a	Primary Wire	18	White	25	.28	1 spool
8018052	n/a	Primary Wire	18	White	100	1.12	1 spool
8018054	n/a	Primary Wire	18	White	250	2.80	1 spool
8018057	n/a	Primary Wire	18	White	500	5.60	1 spool
8018059	n/a	Primary Wire	18	White	1000	11.20	1 spool
8018060	n/a	Primary Wire	18	Blue	25	.28	1 spool
8018062	n/a	Primary Wire	18	Blue	100	1.12	1 spool
8018064	n/a	Primary Wire	18	Blue	250	2.80	1 spool
8018067	n/a	Primary Wire	18	Blue	500	5.60	1 spool
8018069	n/a	Primary Wire	18	Blue	1000	11.20	1 spool
8018070	n/a	Primary Wire	18	Brown	25	.28	1 spool
8018072	n/a	Primary Wire	18	Brown	100	1.12	1 spool
8018074	n/a	Primary Wire	18	Brown	250	2.80	1 spool
8018077	n/a	Primary Wire	18	Brown	500	5.60	1 spool
8018079	n/a	Primary Wire	18	Brown	1000	11.20	1 spool
8018080	n/a	Primary Wire	18	Orange	25	.28	1 spool
8018082	n/a	Primary Wire	18	Orange	100	1.12	1 spool
8018084	n/a	Primary Wire	18	Orange	250	2.80	1 spool
8018087	n/a	Primary Wire	18	Orange	500	5.60	1 spool
8018089	n/a	Primary Wire	18	Orange	1000	11.20	1 spool
8018090	n/a	Primary Wire	18	Pink	25	.28	1 spool
8018092	n/a	Primary Wire	18	Pink	100	1.12	1 spool
8018094	n/a	Primary Wire	18	Pink	250	2.80	1 spool
8018097	n/a	Primary Wire	18	Pink	500	5.60	1 spool
8018099	n/a	Primary Wire	18	Pink	1000	11.20	1 spool
8018100	n/a	Primary Wire	18	Purple	25	.28	1 spool
8018102	n/a	Primary Wire	18	Purple	100	1.12	1 spool
8018104	n/a	Primary Wire	18	Purple	250	2.80	1 spool
8018107	n/a	Primary Wire	18	Purple	500	5.60	1 spool
8018109	n/a	Primary Wire	18	Purple	1000	11.20	1 spool
8018110	n/a	Primary Wire	18	Gray	25	.28	1 spool
8018112	n/a	Primary Wire	18	Gray	100	1.12	1 spool
8018114	n/a	Primary Wire	18	Gray	250	2.80	1 spool
8018117	n/a	Primary Wire	18	Gray	500	5.60	1 spool
8018119	n/a	Primary Wire	18	Gray	1000	11.20	1 spool
8018120	n/a	Primary Wire	18	Tan	25	.28	1 spool
8018130	n/a	Primary Wire	18	Light Blue	25	.28	1 spool
8018140	n/a	Primary Wire	18	Green/Yellow	25	.28	1 spool

18
AWG

Sea-Dog Marine Wire™ is offered in all gauges and colors for primary marine wire applications. All 18 AWG - 6 AWG wire is designed and manufactured for marine use with tinned copper wire for corrosion resistance and improved conductivity. The copper is annealed and finely stranded to offer flexibility and resistance to vibration to ensure reliable performance over time. Primary wire is available in all colors in accordance with ABYC standard. 600V 105°C DRY (75°C WET) and oil resistant. UL Listed Boat Cable. Made in the U.S.A.

WARNING: Cancer and Reproductive Harm - www.P65Warnings.ca.gov





SEA-DOG MARINE WIRE™ BATTERY CABLE

Tinned Copper Stranded Wire

4/0
AWG3/0
AWG2/0
AWG1/0
AWG1
AWG

Bulk	Display	Description	AWG	Color	Length in Feet	Wt.(lb.)	Std. Pack
8041010	n/a	Battery Cable	4/0	Black	25	17.75	2 spools
8041011	n/a	Battery Cable	4/0	Black	50	35.50	1 spool
8041012	n/a	Battery Cable	4/0	Black	100	71.00	1 spool
8041014	n/a	Battery Cable	4/0	Black	250	106.50	1 spool
8041020	n/a	Battery Cable	4/0	Red	25	17.75	2 spools
8041021	n/a	Battery Cable	4/0	Red	50	35.50	1 spool
8041022	n/a	Battery Cable	4/0	Red	100	71.00	1 spool
8041024	n/a	Battery Cable	4/0	Red	250	106.50	1 spool
8041030	n/a	Battery Cable	4/0	Yellow	25	17.75	2 spools
8041031	n/a	Battery Cable	4/0	Yellow	50	35.50	1 spool
8041032	n/a	Battery Cable	4/0	Yellow	100	71.00	1 spool
8041034	n/a	Battery Cable	4/0	Yellow	250	106.50	1 spool
8031010	n/a	Battery Cable	3/0	Black	25	14.00	2 spools
8031011	n/a	Battery Cable	3/0	Black	50	28.00	1 spool
8031012	n/a	Battery Cable	3/0	Black	100	56.00	1 spool
8031014	n/a	Battery Cable	3/0	Black	250	140.00	1 spool
8031020	n/a	Battery Cable	3/0	Red	25	14.00	2 spools
8031021	n/a	Battery Cable	3/0	Red	50	28.00	1 spool
8031022	n/a	Battery Cable	3/0	Red	100	56.00	1 spool
8031024	n/a	Battery Cable	3/0	Red	250	140.00	1 spool
8031030	n/a	Battery Cable	3/0	Yellow	25	14.00	2 spools
8031031	n/a	Battery Cable	3/0	Yellow	50	28.00	1 spool
8031032	n/a	Battery Cable	3/0	Yellow	100	56.00	1 spool
8031034	n/a	Battery Cable	3/0	Yellow	250	140.00	1 spool
8021010	n/a	Battery Cable	2/0	Black	25	10.50	2 spools
8021011	n/a	Battery Cable	2/0	Black	50	21.00	2 spools
8021012	n/a	Battery Cable	2/0	Black	100	42.00	1 spool
8021013	n/a	Battery Cable	2/0	Black	200	84.00	1 spool
8021020	n/a	Battery Cable	2/0	Red	25	10.50	2 spools
8021021	n/a	Battery Cable	2/0	Red	50	21.00	2 spools
8021022	n/a	Battery Cable	2/0	Red	100	42.00	1 spool
8021023	n/a	Battery Cable	2/0	Red	200	84.00	1 spool
8021030	n/a	Battery Cable	2/0	Yellow	25	10.50	2 spools
8021031	n/a	Battery Cable	2/0	Yellow	50	21.00	2 spools
8021032	n/a	Battery Cable	2/0	Yellow	100	42.00	1 spool
8021033	n/a	Battery Cable	2/0	Yellow	200	84.00	1 spool
8011010	n/a	Battery Cable	1/0	Black	25	5.13	2 spools
8011011	n/a	Battery Cable	1/0	Black	50	9.25	2 spools
8011012	n/a	Battery Cable	1/0	Black	100	17.50	1 spool
8011014	n/a	Battery Cable	1/0	Black	250	42.50	1 spool
8011020	n/a	Battery Cable	1/0	Red	25	5.13	2 spools
8011021	n/a	Battery Cable	1/0	Red	50	9.25	2 spools
8011022	n/a	Battery Cable	1/0	Red	100	17.50	1 spool
8011024	n/a	Battery Cable	1/0	Red	250	42.50	1 spool
8011030	n/a	Battery Cable	1/0	Yellow	25	5.13	2 spools
8011031	n/a	Battery Cable	1/0	Yellow	50	9.25	2 spools
8011032	n/a	Battery Cable	1/0	Yellow	100	17.50	1 spool
8011035	n/a	Battery Cable	1/0	Yellow	250	42.50	1 spool
8001010	n/a	Battery Cable	1	Black	25	8.17	4 spools
8001011	n/a	Battery Cable	1	Black	50	16.34	2 spools
8001012	n/a	Battery Cable	1	Black	100	32.68	1 spool
8001015	n/a	Battery Cable	1	Black	300	49.02	1 spool
8001020	n/a	Battery Cable	1	Red	25	8.17	4 spools
8001021	n/a	Battery Cable	1	Red	50	16.34	2 spools
8001022	n/a	Battery Cable	1	Red	100	32.68	1 spool
8001025	n/a	Battery Cable	1	Red	300	49.02	1 spool
8001030	n/a	Battery Cable	1	Yellow	25	8.17	4 spools
8001031	n/a	Battery Cable	1	Yellow	50	16.34	2 spools
8001032	n/a	Battery Cable	1	Yellow	100	32.68	1 spool
8001035	n/a	Battery Cable	1	Yellow	300	49.02	1 spool

SEA-DOG MARINE WIRE™ BATTERY CABLE CONTINUED

Bulk	Display	Description	AWG	Color	Length in Feet	Wt.(lb.)	Std. Pack
8002010	n/a	Battery Cable	2	Black	25	3.17	4 spools
8002011	n/a	Battery Cable	2	Black	50	6.33	2 spools
8002012	n/a	Battery Cable	2	Black	100	12.66	2 spools
8002014	n/a	Battery Cable	2	Black	250	31.65	1 spool
8002017	n/a	Battery Cable	2	Black	500	63.30	1 spool
8002020	n/a	Battery Cable	2	Red	25	3.17	4 spools
8002021	n/a	Battery Cable	2	Red	50	6.33	2 spools
8002022	n/a	Battery Cable	2	Red	100	12.66	2 spools
8002024	n/a	Battery Cable	2	Red	250	31.65	1 spool
8002027	n/a	Battery Cable	2	Red	500	63.30	1 spool
8002030	n/a	Battery Cable	2	Yellow	25	3.17	4 spools
8002031	n/a	Battery Cable	2	Yellow	50	6.33	2 spools
8002032	n/a	Battery Cable	2	Yellow	100	12.66	2 spools
8002034	n/a	Battery Cable	2	Yellow	250	31.65	1 spool
8002037	n/a	Battery Cable	2	Yellow	500	63.30	1 spool
8004010	n/a	Battery Cable	4	Black	25	4.13	4 spools
8004011	n/a	Battery Cable	4	Black	50	8.25	4 spools
8004012	n/a	Battery Cable	4	Black	100	16.50	2 spools
8004014	n/a	Battery Cable	4	Black	250	41.25	1 spool
8004017	n/a	Battery Cable	4	Black	500	82.50	1 spool
8004020	n/a	Battery Cable	4	Red	25	4.13	4 spools
8004021	n/a	Battery Cable	4	Red	50	8.25	4 spools
8004022	n/a	Battery Cable	4	Red	100	16.50	2 spools
8004024	n/a	Battery Cable	4	Red	250	41.25	1 spool
8004027	n/a	Battery Cable	4	Red	500	82.50	1 spool
8004030	n/a	Battery Cable	4	Yellow	25	4.13	4 spools
8004031	n/a	Battery Cable	4	Yellow	50	8.25	4 spools
8004032	n/a	Battery Cable	4	Yellow	100	16.50	2 spools
8004034	n/a	Battery Cable	4	Yellow	250	41.25	1 spool
8004037	n/a	Battery Cable	4	Yellow	500	82.50	1 spool

2
AWG4
AWG

Sea-Dog Marine Wire™ is offered in larger gauges for battery cable installations. All 4 AWG- 4/0 AWG cables are designed and manufactured for marine use with tinned copper wire for corrosion resistance and improved conductivity. The copper is annealed and finely stranded to offer flexibility and resistance to vibration to ensure reliable performance over time. Battery Cable is available in all colors in accordance with ABYC standard. 600V 105°C DRY (75°C WET) and oil resistant. UL Listed Boat Cable. Made in the U.S.A.

WARNING: Cancer and Reproductive Harm - www.P65Warnings.ca.gov

SEA-DOG MARINE WIRE™ DUPLEX/SAFETY - FLAT WIRE

Tinned Copper Stranded Wire



Bulk	Display	Description	AWG	Color	Length in Feet	Wt.(lb.)	Std. Pack
8006201	n/a	Duplex - Flat Wire	6	Red/Black	50	15.61	1 spool
8006202	n/a	Duplex - Flat Wire	6	Red/Black	100	31.22	1 spool
8006221	n/a	Duplex - Flat - Safety Wire	6	Red/Yellow	50	15.61	1 spool
8006222	n/a	Duplex - Flat - Safety Wire	6	Red/Yellow	100	31.22	1 spool
8008201	n/a	Duplex - Flat Wire	8	Red/Black	50	10.45	1 spool
8008202	n/a	Duplex - Flat Wire	8	Red/Black	100	20.90	1 spool
8008204	n/a	Duplex - Flat Wire	8	Red/Black	250	52.25	1 spool
8008221	n/a	Duplex - Flat - Safety Wire	8	Red/Yellow	50	10.45	1 spool
8008222	n/a	Duplex - Flat - Safety Wire	8	Red/Yellow	100	20.90	1 spool
8008227	n/a	Duplex - Flat - Safety Wire	8	Red/Yellow	500	104.50	1 spool
8010202	n/a	Duplex - Flat Wire	10	Red/Black	100	9.93	1 spool
8010204	n/a	Duplex - Flat Wire	10	Red/Black	250	24.83	1 spool
8010207	n/a	Duplex - Flat Wire	10	Red/Black	500	44.00	1 spool
8010220	n/a	Duplex - Flat - Safety Wire	10	Red/Yellow	25	2.48	1 spool
8010222	n/a	Duplex - Flat - Safety Wire	10	Red/Yellow	100	9.93	1 spool
8010224	n/a	Duplex - Flat - Safety Wire	10	Red/Yellow	250	24.83	1 spool
8010227	n/a	Duplex - Flat - Safety Wire	10	Red/Yellow	500	44.00	1 spool
8012202	n/a	Duplex - Flat Wire	12	Red/Black	100	7.21	1 spool
8012204	n/a	Duplex - Flat Wire	12	Red/Black	250	18.03	1 spool

6
AWG8
AWG10
AWG12
AWG12 AWG
CONTINUES ON
NEXT PAGE



SEA-DOG MARINE WIRE™ DUPLEX/SAFETY - FLAT WIRE CONTINUED

	Bulk	Display	Description	AWG	Color	Length in Feet	Wt.(lb.)	Std. Pack
12 AWG	8012207	n/a	Duplex - Flat Wire	12	Red/Black	500	36.05	1 spool
	8012220	n/a	Duplex - Flat - Safety Wire	12	Red/Yellow	25	1.80	1 spool
	8012222	n/a	Duplex - Flat - Safety Wire	12	Red/Yellow	100	7.21	1 spool
	8012224	n/a	Duplex - Flat - Safety Wire	12	Red/Yellow	250	18.03	1 spool
	8012227	n/a	Duplex - Flat - Safety Wire	12	Red/Yellow	500	36.05	1 spool
14 AWG	8014202	n/a	Duplex - Flat Wire	14	Red/Black	100	5.37	1 spool
	8014204	n/a	Duplex - Flat Wire	14	Red/Black	250	13.43	1 spool
	8014209	n/a	Duplex - Flat Wire	14	Red/Black	1000	53.70	1 spool
	8014220	n/a	Duplex - Flat Wire	14	Red/Yellow	25	1.34	1 spool
	8014222	n/a	Duplex - Flat - Safety Wire	14	Red/Yellow	100	5.37	1 spool
	8014224	n/a	Duplex - Flat - Safety Wire	14	Red/Yellow	250	13.43	1 spool
	8014227	n/a	Duplex - Flat - Safety Wire	14	Red/Yellow	500	26.85	1 spool
16 AWG	8014229	n/a	Duplex - Flat - Safety Wire	14	Red/Yellow	1000	53.70	1 spool
	8016200	n/a	Duplex - Flat Wire	16	Red/Black	25	1.19	1 spool
	8016202	n/a	Duplex - Flat Wire	16	Red/Black	100	4.76	1 spool
	8016204	n/a	Duplex - Flat Wire	16	Red/Black	250	11.90	1 spool
	8016207	n/a	Duplex - Flat Wire	16	Red/Black	500	23.80	1 spool
	8016209	n/a	Duplex - Flat Wire	16	Red/Black	1000	47.60	1 spool
	8016222	n/a	Duplex - Flat - Safety Wire	16	Red/Yellow	100	4.76	1 spool
	8016224	n/a	Duplex - Flat - Safety Wire	16	Red/Yellow	250	11.90	1 spool
18 AWG	8016229	n/a	Duplex - Flat - Safety Wire	16	Red/Yellow	1000	47.60	1 spool
	8018202	n/a	Duplex - Flat Wire	18	Red/Black	100	4.00	1 spool
	8018204	n/a	Duplex - Flat Wire	18	Red/Black	250	10.00	1 spool
	8018207	n/a	Duplex - Flat Wire	18	Red/Black	500	20.00	1 spool
	8018222	n/a	Duplex - Flat - Safety Wire	18	Red/Yellow	100	4.00	1 spool
	8018224	n/a	Duplex - Flat - Safety Wire	18	Red/Yellow	250	10.00	1 spool
	8018227	n/a	Duplex - Flat - Safety Wire	18	Red/Yellow	500	20.00	1 spool
	8018229	n/a	Duplex - Flat - Safety Wire	18	Red/Yellow	1000	40.00	1 spool

Sea-Dog Marine Wire™ is offered in 16/2- 6/2 gauges for duplex boat cable installations. All duplex cable is sheathed in PVC and is flat in construction. It is designed and manufactured for marine use with tinned copper wire for corrosion resistance and improved conductivity. The copper is annealed and finely stranded to offer flexibility and resistance to vibration to ensure reliable performance over time. Duplex Cable is available in all colors in accordance with ABYC standard. 600V 105°C DRY (75°C WET) and oil resistant. UL Listed Boat Cable. Made in the U.S.A.

⚠WARNING: Cancer and Reproductive Harm - www.P65Warnings.ca.gov



SEA-DOG MARINE WIRE™ TRIPLEX - FLAT WIRE


Tinned Copper Stranded Wire



	Bulk	Display	Description	AWG	Color	Length in Feet	Wt.(lb.)	Std. Pack
10 AWG	8010302	n/a	Triplex - Flat Wire	10	White/Green/Black	100	15.42	1 spool
	8010305	n/a	Triplex - Flat Wire	10	White/Green/Black	300	46.26	1 spool
	8010307	n/a	Triplex - Flat Wire	10	White/Green/Black	500	77.10	1 spool
12 AWG	8012300	n/a	Triplex - Flat Wire	12	White/Green/Black	25	2.55	1 spool
	8012302	n/a	Triplex - Flat Wire	12	White/Green/Black	100	10.22	1 spool
	8012304	n/a	Triplex - Flat Wire	12	White/Green/Black	250	25.55	1 spool
	8012307	n/a	Triplex - Flat Wire	12	White/Green/Black	500	52.70	1 spool
14 AWG	8014302	n/a	Triplex - Flat Wire	14	White/Green/Black	100	7.00	1 spool
	8014304	n/a	Triplex - Flat Wire	14	White/Green/Black	250	17.50	1 spool
	8014307	n/a	Triplex - Flat Wire	14	White/Green/Black	500	35.00	1 spool
16 AWG	8016302	n/a	Triplex - Flat Wire	16	White/Green/Black	100	5.10	1 spool
	8016304	n/a	Triplex - Flat Wire	16	White/Green/Black	250	12.75	1 spool
	8016307	n/a	Triplex - Flat Wire	16	White/Green/Black	500	25.50	1 spool

Sea-Dog Marine Wire™ is offered in 16/3- 6/3 gauges for triplex boat cable installations. All Triplex wire is sheathed in flexible PVC and is flat in construction. It is designed and manufactured for marine use with tinned copper wire for corrosion resistance and improved conductivity. The copper is annealed and finely stranded to offer flexibility and resistance to vibration to ensure reliable performance over time. Triplex Cable is available in all colors in accordance with ABYC standard. 600V 105°C DRY (75°C WET) and oil resistant. UL Listed Boat Cable. Made in the U.S.A.

⚠WARNING: Cancer and Reproductive Harm - www.P65Warnings.ca.gov


**HEAT SHRINK BUTT CONNECTOR**

Tin-Plated Copper/Injection-Molded Nylon



Bulk	Display	AWG	Color	Qty. Per Bag	Listed	Wt.(lb.)	Std. Pack
429110H	429110H-1	22-18	Red	100/6	UL/CSA	1.00 / .06	5 bag / 10 sets
n/a	429110H-2	22-18	Red	25	UL/CSA	.25	10 sets
429130H	429130H-1	16-14	Blue	100/6	UL/CSA	1.00 / .06	5 bag / 10 sets
n/a	429130H-2	16-14	Blue	25	UL/CSA	.25	10 sets
429150H	429150H-1	12-10	Yellow	100/6	UL/CSA	1.00 / .06	5 bag / 10 sets
n/a	429150H-2	12-10	Yellow	25	UL/CSA	.25	10 sets

Heat Shrink Butt Connectors are designed to transfer electrical current. Most commonly used to connect or splice two wires together to lengthen, change, or repair an electrical circuit. Frequently used during product installation to eliminate soldering the wire joint. Pliable when crimping, the insulation also offers superior heat and deformation resistance. Transparent insulation allows for easy inspection of wire connections. These connectors benefit from the addition of heat shrink insulation, protecting against moisture and vibration, preventing corrosion and accidental wire pull-out, and significantly increasing the longevity and dependability of the connection. Industry standard color-coding indicates wire size range. Constructed of injection-molded nylon insulation and tin-plated copper solid barrel for maximum conductivity and holding strength. Terminals comply with ABYC standard E-11.

**HEAT SHRINK RING TERMINAL**

Tin-Plated Copper/Injection-Molded Nylon



Bulk	Display	AWG	Ring	Color	Qty. Per Bag	Listed	Wt.(lb.)	Std. Pack
429212H	429212H-1	22-18	#4-6	Red	100/6	UL/CSA	1.00 / .06	5 bag / 10 sets
429213H	429213H-1	22-18	#8	Red	100/6	UL/CSA	1.00 / .06	5 bag / 10 sets
429214H	429214H-1	22-18	#10	Red	100/6	UL/CSA	1.00 / .06	5 bag / 10 sets
429216H	429216H-1	22-18	1/4"	Red	100/6	UL/CSA	1.00 / .06	5 bag / 10 sets
429217H	429217H-1	22-18	5/16"	Red	100/6	UL/CSA	1.00 / .06	5 bag / 10 sets
429218H	429218H-1	22-18	3/8"	Red	100/6	UL/CSA	1.00 / .06	5 bag / 10 sets
429232H	429232H-1	16-14	#4-6	Blue	100/6	UL/CSA	1.00 / .06	5 bag / 10 sets
429233H	429233H-1	16-14	#8	Blue	100/6	UL/CSA	1.00 / .06	5 bag / 10 sets
429234H	429234H-1	16-14	#10	Blue	100/6	UL/CSA	1.00 / .06	5 bag / 10 sets
429236H	429236H-1	16-14	1/4"	Blue	100/6	UL/CSA	1.00 / .06	5 bag / 10 sets
429237H	429237H-1	16-14	5/16"	Blue	100/6	UL/CSA	1.00 / .06	5 bag / 10 sets
429238H	429238H-1	16-14	3/8"	Blue	100/6	UL/CSA	1.00 / .06	5 bag / 10 sets
429252H	429252H-1	12-10	#4-6	Yellow	100/6	UL/CSA	1.00 / .06	5 bag / 10 sets
429253H	429253H-1	12-10	#8	Yellow	100/6	UL/CSA	1.00 / .06	5 bag / 10 sets
429254H	429254H-1	12-10	#10	Yellow	100/6	UL/CSA	1.00 / .06	5 bag / 10 sets
429256H	429256H-1	12-10	1/4"	Yellow	100/6	UL/CSA	1.00 / .06	5 bag / 10 sets
429257H	429257H-1	12-10	5/16"	Yellow	100/6	UL/CSA	1.00 / .06	5 bag / 10 sets
429258H	429258H-1	12-10	3/8"	Yellow	100/6	UL/CSA	1.00 / .06	5 bag / 10 sets

Heat Shrink Ring Terminals are designed to transfer electrical current. Ring terminals connect two or more wires to a single connection point. These connectors can be crimped anywhere and are frequently used during electronic installations to eliminate soldering the wire joint. Pliable when crimping, the insulation also offers superior heat and deformation resistance. Transparent insulation allows for easy inspection of wire connection. These connectors benefit from the addition of heat shrink insulation, protecting against moisture and vibration, preventing corrosion and accidental wire pull-out, and significantly increasing the longevity and dependability of the connection. Industry standard color-coding indicates wire size range. Constructed of injection-molded nylon insulation and tin-plated copper barrel and ring for maximum conductivity and holding strength. Terminals comply with ABYC standard E-11.


**Don't see what
you need?**

Contact
customer service
sales@sea-dog.com



HEAT SHRINK INSULATED PUSH-ON TERMINAL

Tin-Plated Copper/Injection-Molded Nylon

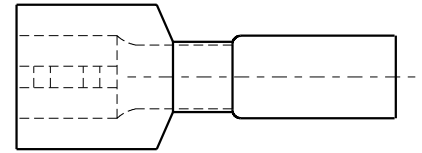


Bulk	Display	Size	AWG	Male/Female	Color	Qty. Per Bag	Listed	Wt.(lb.)	Std. Pack
429311H	429311H-1	.250"	22-18	Male	Red	100/6	UL/CSA	1.00 / .06	5 bag / 10 sets
429315H	429315H-1	.250"	22-18	Female	Red	100/6	UL/CSA	1.00 / .06	5 bag / 10 sets
429331H	429331H-1	.250"	16-14	Male	Blue	100/6	UL/CSA	1.00 / .06	5 bag / 10 sets
429335H	429335H-1	.250"	16-14	Female	Blue	100/6	UL/CSA	1.00 / .06	5 bag / 10 sets
429351H	429351H-1	.250"	12-10	Male	Yellow	100/4	UL/CSA	1.00 / .04	5 bag / 10 sets
429355H	429355H-1	.250"	12-10	Female	Yellow	100/4	UL/CSA	1.00 / .04	5 bag / 10 sets

Heat Shrink Insulated Push-On Terminals are designed to transfer electrical current. Push-On terminals create a quick connect termination for situations where the connection may need to be broken with frequency. These connectors can be crimped anywhere and are frequently used during electronic installations to eliminate soldering the wire joint. Pliable when crimping, the insulation also offers superior heat and deformation resistance. Transparent insulation allows for easy inspection of wire connection. These connectors benefit from the addition of heat shrink insulation, protecting against moisture and vibration, preventing corrosion and accidental wire pull-out, and significantly increasing the longevity and dependability of the connection. Industry standard color-coding indicates wire size range. Constructed of injection-molded nylon insulation and tin-plated copper barrel for maximum conductivity and holding strength. Terminals comply with ABYC standard E-11.



TERMINAL LUGS

Tinned Copper




Bulk	Display	Wire AWG	Mounting Hole Size	Qty. Per Bag	Wt.(lb.)	Std. Pack
n/a	429460-1	8	#10	2	0.02	10 pr
n/a	429460-2	8	#10	25	0.25	5 sets
n/a	429461-1	8	1/4"	2	0.04	10 pr
n/a	429461-2	8	1/4"	25	0.5	5 sets
n/a	429462-1	8	5/16"	2	0.05	10 pr
n/a	429462-2	8	5/16"	25	0.63	5 sets
n/a	429463-1	8	3/8"	2	0.06	10 pr
n/a	429463-2	8	3/8"	25	0.75	5 sets
n/a	429464-1	8	1/2"	2	0.07	10 pr
n/a	429465-1	6	1/4"	2	0.08	10 pr
n/a	429465-2	6	1/4"	25	1	5 sets
n/a	429466-1	6	5/16"	2	0.09	10 pr
n/a	429466-2	6	5/16"	25	1.13	5 sets
n/a	429467-1	6	3/8"	2	0.1	10 pr
n/a	429467-2	6	3/8"	25	1.25	5 sets
n/a	429468-1	6	1/2"	2	0.11	10 pr
n/a	429468-2	6	1/2"	25	1.38	5 sets
n/a	429470-1	4	5/16"	2	0.13	10 pr
n/a	429470-2	4	5/16"	25	1.63	5 sets
n/a	429471-1	4	3/8"	2	0.14	10 pr
n/a	429471-2	4	3/8"	25	1.75	5 sets
n/a	429472-1	4	1/2"	2	0.15	10 pr
n/a	429473-1	2	1/4"	2	0.16	10 pr
n/a	429473-2	2	1/4"	25	2	5 sets
n/a	429474-1	2	5/16"	2	0.17	10 pr
n/a	429474-2	2	5/16"	25	2.13	5 sets
n/a	429475-1	2	3/8"	2	0.18	10 pr
n/a	429475-2	2	3/8"	25	2.25	5 sets
n/a	429476-1	2	1/2"	2	0.19	10 pr
n/a	429477-1	1	1/4"	2	0.2	10 pr
n/a	429477-2	1	1/4"	25	2.5	5 sets
n/a	429478-1	1	5/16"	2	0.21	10 pr
n/a	429478-2	1	5/16"	25	2.63	5 sets
n/a	429479-1	1	3/8"	2	0.22	10 pr
n/a	429479-2	1	3/8"	25	2.75	5 sets
n/a	429480-1	1	1/2"	2	0.23	10 pr
n/a	429481-1	1/0	1/4"	2	0.24	10 pr
n/a	429482-1	1/0	5/16"	2	0.25	10 pr

TERMINAL LUGS CONTINUED

Bulk	Display	Wire AWG	Mounting Hole Size	Qty. Per Bag	Wt.(lb.)	Std. Pack
n/a	429483-1	1/0	3/8"	2	0.26	10 pr
n/a	429484-1	1/0	1/2"	2	0.27	10 pr
n/a	429485-1	2/0	1/4"	2	0.28	10 pr
n/a	429486-1	2/0	5/16"	2	0.29	10 pr
n/a	429487-1	2/0	3/8"	2	0.3	10 pr
n/a	429488-1	2/0	1/2"	2	0.31	10 pr
n/a	429489-1	3/0	1/4"	2	0.32	10 pr
n/a	429490-1	3/0	5/16"	2	0.33	10 pr
n/a	429491-1	3/0	3/8"	2	0.34	10 pr
n/a	429492-1	3/0	1/2"	2	0.35	10 pr
n/a	429493-1	4/0	1/4"	2	0.36	10 pr
n/a	429494-1	4/0	5/16"	2	0.37	10 pr
n/a	429495-1	4/0	3/8"	2	0.38	10 pr
n/a	429496-1	4/0	1/2"	2	0.39	10 pr

Manufactured from 100% heavy-duty annealed tinned copper, providing for maximum current flow while resisting corrosion from salt and moisture. Seamless barrel design allows for maximum strength when crimped. Closed end seals out moisture so cables stay dry and corrosion free.

▲WARNING: Cancer and Reproductive Harm - www.P65Warnings.ca.gov

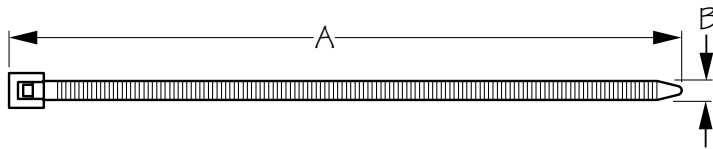

UL CABLE TIE - STANDARD

Injection-Molded Nylon



Bulk	Display	A	B	Color	B.S. (lb.)	Qty. Per Bag	Wt.(lb.)	Std. Pack
n/a	427104-1	4"	7/64"	White	18	10	.01	5 bags
n/a	427104-2	4"	7/64"	White	18	25	.02	5 bags
n/a	427104-4	4"	7/64"	White	18	100	.05	5 bags
n/a	427105-1	5-5/8"	7/64"	White	40	10	.02	5 bags
n/a	427105-2	5-5/8"	7/64"	White	40	25	.04	5 bags
n/a	427105-4	5-5/8"	7/64"	White	40	100	.18	5 bags
n/a	427108-1	8"	9/64"	White	40	10	.02	5 bags
n/a	427108-2	8"	9/64"	White	40	25	.06	5 bags
n/a	427108-4	8"	9/64"	White	40	100	.25	5 bags
n/a	427110-1	10-1/2"	3/16"	White	50	10	.04	5 bags
n/a	427110-2	10-1/2"	3/16"	White	50	25	.10	5 bags
n/a	427110-4	10-1/2"	3/16"	White	50	100	.40	5 bags
n/a	427115-1	14-1/2"	19/64"	White	120	10	.12	5 bags
n/a	427115-2	14-1/2"	19/64"	White	120	25	.29	5 bags
n/a	427115-4	14-1/2"	19/64"	White	120	100	1.17	5 bags
427204	427204-1	4"	7/64"	Black	18	100/10	.07 / .01	5 bags
n/a	427204-2	4"	7/64"	Black	18	25	.02	5 bags
n/a	427204-4	4"	7/64"	Black	18	100	.07	5 bags
427205	427205-1	5-5/8"	7/64"	Black	40	100/10	.18 / .02	5 bags
n/a	427205-2	5-5/8"	7/64"	Black	40	25	.04	5 bags
n/a	427205-4	5-5/8"	7/64"	Black	40	100	.18	5 bags
427209	427209-1	7-7/8"	9/64"	Black	50	100/10	.34 / .03	5 bags
n/a	427209-2	7-7/8"	9/64"	Black	50	25	.08	5 bags
n/a	427209-4	7-7/8"	9/64"	Black	50	100	.34	5 bags
427210	427210-1	11-3/4"	3/16"	Black	50	100/10	.41 / .04	5 bags
n/a	427210-2	11-3/4"	3/16"	Black	50	25	.10	5 bags
n/a	427210-4	11-3/4"	3/16"	Black	50	100	.41	5 bags
427215	427215-1	14-1/2"	19/64"	Black	120	100/10	1.17 / .12	5 bags
n/a	427215-2	14-1/2"	19/64"	Black	120	25	.29	5 bags
n/a	427215-4	14-1/2"	19/64"	Black	120	100	1.17	5 bags

Standard UL Cable Ties are used to bundle and organize cable and wire runs, as well as to simplify installation and maintenance. Temperature Rating: -40°F to 185°F. Flammability Rating: UL 94 V-2. Constructed of UV stabilized injection-molded nylon for continuous or extended exposure to the outdoor environment. Available in Black or White.



UL CABLE TIE - MIXED KIT

Injection-Molded Nylon



Bulk	Display	Description	Wt.(lb.)	Std. Pack
n/a	427290-1	Cable Tie - Mixed Kit (Black)	.24	5 ea

The Cable Tie Mixed Kit includes 25 each of black UL cable ties in 4", 5-5/8", 8-1/2", and 10-1/2" sizes. Temperature Rating: -40°F to 185°F. Flammability Rating: UL 94 V-2. Constructed of UV-stabilized injection-molded nylon for continuous or extended exposure to the outdoor environment.



SPIRAL CABLE WRAP

Polyethylene

Bulk	Display	Diameter	Length	Color	Wt.(lb.)	Std. Pack
427501	427501-1	1/4"	100' / 10'	Black	1.30/.13	1 ea/10 ea
427503	427503-1	3/8"	100' / 10'	Black	1.50/.15	1 ea/10 ea
427505	427505-1	1/2"	100' / 10'	Black	1.70/.17	1 ea/10 ea
427507	427507-1	3/4"	100' / 10'	Black	3.30/.33	1 ea/10 ea
427509	427509-1	1"	100' / 10'	Black	4.50/.45	1 ea/10 ea

Spiral Cable Wrap offers secure, flexible bundling of wire and cable. Ideal for permanent and custom installations. The abrasion-resistant wrap allows wires to flex while staying protected, especially in installations where movement may occur. Constructed of Polyethylene. Designed for use in ABYC-compliant systems.

⚠WARNING: Cancer and Reproductive Harm - www.P65Warnings.ca.gov



SPLIT LOOM

Nylon

Bulk	Display	Diameter	Length	Color	Wt.(lb.)	Std. Pack
427521	427521-1	3/8"	100' / 10'	Black	1.50/.15	1 ea/10 ea
427523	427523-1	1/2"	100' / 10'	Black	3.00/.30	1 ea/10 ea
427525	427525-1	3/4"	100' / 10'	Black	4.50/.45	1 ea/10 ea
427527	427527-1	1"	100' / 10'	Black	7.00/.70	1 ea/10 ea


Split Loom helps protect and organize wiring by shielding cables from abrasion, heat, moisture, and chemicals. Ideal for quick installations by adding or removing wires without disconnecting the entire bundle. Designed for use in ABYC-compliant systems to prevent accidental contact between wires, minimizing the risk of short circuits. Constructed of UL 94V-2 fire-retardant Nylon.

⚠WARNING: Cancer and Reproductive Harm - www.P65Warnings.ca.gov



CUSHIONED CABLE CLAMPS

316 Stamped Stainless/Rubber


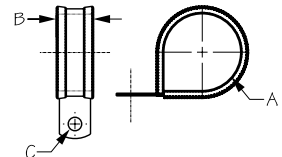


Bulk	Display	A	B	C (Fastener)	Qty. Per Bag	Wt.(lb.)	Std. Pack
n/a	428004-1	3/8"	3/4"	1/4" RH	10	.15	10 bags
n/a	428005-1	1/2"	3/4"	1/4" RH	10	.20	10 bags
n/a	428008-1	3/4"	3/4"	1/4" RH	10	.25	10 bags
n/a	428010-1	1"	3/4"	1/4" RH	10	.40	10 bags
n/a	428011-1	1-1/4"	3/4"	1/4" RH	10	.40	10 bags
n/a	428012-1	1-1/2"	3/4"	1/4" RH	10	.50	10 bags
n/a	428013-1	1-3/4"	3/4"	1/4" RH	10	.60	10 bags
n/a	428015-1	2-1/2"	3/4"	1/4" RH	10	.70	10 bags

Stainless steel cushion clamps offer durability and secure cable management. Designed to resist temperature, water, fuel and acid, they are intended for use in ABYC-marine-compliant systems. Constructed of 316 stainless steel for corrosion resistance.

⚠WARNING: Cancer and Reproductive Harm - www.P65Warnings.ca.gov



**CABLE CLAMPS**

Injection-Molded Nylon



Bulk	Display	Color	A	B	C	Qty. Per Bag	Wt.(lb.)	Std. Pack
n/a	428032-1	White	3/16"	3/8"	3/16"	10	.01	5 bags
n/a	428032-2	White	3/16"	3/8"	3/16"	25	.03	5 bags
n/a	428032-4	White	3/16"	3/8"	3/16"	100	.12	5 bags
n/a	428033-1	White	1/4"	3/8"	3/16"	10	.01	5 bags
n/a	428033-2	White	1/4"	3/8"	3/16"	25	.03	5 bags
n/a	428033-4	White	1/4"	3/8"	3/16"	100	.12	5 bags
n/a	428034-1	White	5/16"	3/8"	3/16"	10	.01	5 bags
n/a	428034-2	White	5/16"	3/8"	3/16"	25	.04	5 bags
n/a	428034-4	White	5/16"	3/8"	3/16"	100	.15	5 bags
n/a	428035-1	White	3/8"	3/8"	3/16"	10	.01	5 bags
n/a	428035-2	White	3/8"	3/8"	3/16"	25	.04	5 bags
n/a	428035-4	White	3/8"	3/8"	3/16"	100	.17	5 bags
n/a	428037-1	White	1/2"	3/8"	3/16"	10	.02	5 bags
n/a	428037-2	White	1/2"	3/8"	3/16"	25	.05	5 bags
n/a	428037-4	White	1/2"	3/8"	3/16"	100	.18	5 bags
n/a	428059-1	White	5/8"	1/2"	3/16"	10	.03	5 bags
n/a	428059-2	White	5/8"	1/2"	3/16"	25	.08	5 bags
n/a	428059-4	White	5/8"	1/2"	3/16"	100	.30	5 bags
n/a	428061-1	White	3/4"	1/2"	3/16"	10	.03	5 bags
n/a	428061-2	White	3/4"	1/2"	3/16"	25	.09	5 bags
n/a	428061-4	White	3/4"	1/2"	3/16"	100	.37	5 bags
n/a	428065-1	White	1"	1/2"	3/16"	10	.04	5 bags
n/a	428065-2	White	1"	1/2"	3/16"	25	.11	5 bags
n/a	428065-4	White	1"	1/2"	3/16"	100	.44	5 bags
n/a	428073-1	White	1-1/2"	1/2"	3/16"	10	.07	5 bags
n/a	428073-2	White	1-1/2"	1/2"	3/16"	25	.19	5 bags
n/a	428073-4	White	1-1/2"	1/2"	3/16"	100	.73	5 bags
428232	428232-1	Black	3/16"	3/8"	3/16"	100/10	.12 / .01	5 bags
n/a	428232-2	Black	3/16"	3/8"	3/16"	25	.03	5 bags
n/a	428232-4	Black	3/16"	3/8"	3/16"	100	.12	5 bags
428233	428233-1	Black	1/4"	3/8"	3/16"	100/10	.12 / .01	5 bags
n/a	428233-2	Black	1/4"	3/8"	3/16"	25	.03	5 bags
n/a	428233-4	Black	1/4"	3/8"	3/16"	100	.12	5 bags
428234	428234-1	Black	5/16"	3/8"	3/16"	100/10	.15 / .01	5 bags
n/a	428234-2	Black	5/16"	3/8"	3/16"	25	.04	5 bags
n/a	428234-4	Black	5/16"	3/8"	3/16"	100	.15	5 bags
428235	428235-1	Black	3/8"	1/2"	3/16"	100/10	.17 / .01	5 bags
n/a	428235-2	Black	3/8"	1/2"	3/16"	25	.04	5 bags
n/a	428235-4	Black	3/8"	1/2"	3/16"	100	.17	5 bags
428237	428237-1	Black	1/2"	1/2"	3/16"	100/10	.19 / .02	5 bags
n/a	428237-2	Black	1/2"	1/2"	3/16"	25	.05	5 bags
n/a	428237-4	Black	1/2"	1/2"	3/16"	100	.19	5 bags
428259	428259-1	Black	5/8"	1/2"	3/16"	100/10	.30 / .03	5 bags
n/a	428259-2	Black	5/8"	1/2"	3/16"	25	.08	5 bags
n/a	428259-4	Black	5/8"	1/2"	3/16"	100	.30	5 bags
428261	428261-1	Black	3/4"	1/2"	3/16"	100/10	.37 / .03	5 bags
n/a	428261-2	Black	3/4"	1/2"	3/16"	25	.09	5 bags
n/a	428261-4	Black	3/4"	1/2"	3/16"	100	.37	5 bags
428265	428265-1	Black	1"	1/2"	3/16"	100/10	.44 / .04	5 bags
n/a	428265-2	Black	1"	1/2"	3/16"	25	.11	5 bags
n/a	428265-4	Black	1"	1/2"	3/16"	100	.44	5 bags

Cable Clamps are used to bundle and organize cable and wire runs, as well as simplify installation and maintenance. Temperature Rating: -40°F to 185°F. Flammability Rating: UL 94 V-2. Constructed of UV-stabilized injection-molded nylon.



HEAT SHRINK

Polyolefin

Bulk	Display	Diameter	Length	Pieces	Color	Wt.(lb.)	Std. Pack
n/a	429600-1	1/4"	3"	3	Black	.03	10 sets
n/a	429601-1	1/4"	3"	3	Red	.03	10 sets
n/a	429602-1	1/4"	3"	3	Yellow	.03	10 sets
n/a	429603-1	1/4"	6"	10	Black	.06	10 sets
n/a	429604-1	1/4"	6"	10	Red	.06	10 sets
n/a	429605-1	1/4"	6"	10	Yellow	.06	10 sets
n/a	429606-1	1/4"	12"	10	Black	.09	10 sets
n/a	429607-1	1/4"	12"	10	Red	.09	10 sets
n/a	429608-1	1/4"	12"	10	Yellow	.09	10 sets
n/a	429609-1	1/4"	48"	1	Black	.36	10 ea
n/a	429610-1	1/4"	48"	1	Red	.36	10 ea
n/a	429611-1	1/4"	48"	1	Yellow	.36	10 ea
n/a	429620-1	3/8"	3"	3	Black	.04	10 sets
n/a	429621-1	3/8"	3"	3	Red	.04	10 sets
n/a	429622-1	3/8"	3"	3	Yellow	.04	10 sets
n/a	429623-1	3/8"	6"	5	Black	.08	10 sets
n/a	429624-1	3/8"	6"	5	Red	.08	10 sets
n/a	429625-1	3/8"	6"	5	Yellow	.08	10 sets
n/a	429626-1	3/8"	12"	5	Black	.16	10 sets
n/a	429627-1	3/8"	12"	5	Red	.16	10 sets
n/a	429628-1	3/8"	12"	5	Yellow	.16	10 sets
n/a	429629-1	3/8"	48"	1	Black	.40	10 ea
n/a	429630-1	3/8"	48"	1	Red	.40	10 ea
n/a	429631-1	3/8"	48"	1	Yellow	.40	10 ea
n/a	429632-1	3/8"	3"	2	Black/Red (Battery Combo)	.15	10 sets
n/a	429640-1	1/2"	3"	3	Black	.10	10 sets
n/a	429641-1	1/2"	3"	3	Red	.10	10 sets
n/a	429642-1	1/2"	3"	3	Yellow	.10	10 sets
n/a	429643-1	1/2"	6"	5	Black	.20	10 sets
n/a	429644-1	1/2"	6"	5	Red	.20	10 sets
n/a	429645-1	1/2"	6"	5	Yellow	.20	10 sets
n/a	429646-1	1/2"	12"	5	Black	.30	10 sets
n/a	429647-1	1/2"	12"	5	Red	.30	10 sets
n/a	429648-1	1/2"	12"	5	Yellow	.30	10 sets
n/a	429649-1	1/2"	48"	1	Black	.48	10 ea
n/a	429650-1	1/2"	48"	1	Red	.48	10 ea
n/a	429651-1	1/2"	48"	1	Yellow	.48	10 ea
n/a	429660-1	3/4"	3"	3	Black	.25	10 sets
n/a	429661-1	3/4"	3"	3	Red	.25	10 sets
n/a	429662-1	3/4"	3"	3	Yellow	.25	10 sets
n/a	429663-1	3/4"	3"	2	Black/Red (Battery Combo)	.25	10 sets
n/a	429664-1	3/4"	6"	5	Black	.30	10 sets
n/a	429665-1	3/4"	6"	5	Red	.30	10 sets
n/a	429666-1	3/4"	6"	5	Yellow	.30	10 sets
n/a	429667-1	3/4"	12"	4	Black	.35	10 sets
n/a	429668-1	3/4"	12"	4	Red	.35	10 sets
n/a	429669-1	3/4"	12"	4	Yellow	.35	10 sets
n/a	429670-1	3/4"	48"	1	Black	.45	10 ea
n/a	429671-1	3/4"	48"	1	Red	.45	10 ea
n/a	429672-1	3/4"	48"	1	Yellow	.45	10 ea
n/a	429674-6	1/4"-3/4"	3"	30	Black/Red/Yellow (Contractors Box)	1.00	10 sets
n/a	429675-6	1/4"-3/4"	6"	30	Black/Red/Yellow (Contractors Box)	1.00	10 sets
n/a	429679-1	1/4" Write-On Labels	2-1/4"	10	Clear w/ White Writing Surface	.15	10 sets

Thin, 3-to-1 shrink ratio tubing provides insulation and abrasion protection for wires and cables. Flexible yet durable material resists most common oils, chemicals and fluids. Shrinks at 257F/125C. Operating temperature -45C to +125C. Color options for ABYC-compliant systems. UL 224VW-1 Recognized.

⚠WARNING: Cancer and Reproductive Harm - www.P65Warnings.ca.gov



DEPENDABILITY YOU CAN BUILD INTO EVERY BOAT



Salt, vibration, humidity, and demanding duty cycles separate marine-grade equipment from everything else. Sea-Dog® chargers are engineered specifically for life aboard, providing safe, reliable charging where it matters most.

Sea-Dog® Marine
Proven on the Water



Scan for more info


View the
full range
of Sea-Dog
Power Sockets

SEA-DOG.COM



BILGE PUMP WATER ALARM PANEL WITH SWITCH

Injection-Molded ABS



Bulk	Display	A	B	C	D	Volts	Wt.(lb.)	Std. Pack
n/a	423037-3	2-3/8"	4-11/16"	1-1/2"	3-7/8"	12	.33	10 ea


The Bilge Pump Water Alarm Panel with Switch provides both an audible and visual means of warning that the water level in your bilge is above your bilge pump float switch level. There is no need for a separate bilge pump switch, as the control switch selects between the automatic and manual (momentary on) function of the bilge pump. 20A fuse holder. Constructed of injection-molded ABS. Installs with gasket and four RH fasteners (included).

⚠WARNING: Cancer and Reproductive Harm - www.P65Warnings.ca.gov



FRONT MOUNT SOCKET PANEL

Injection-Molded Nylon

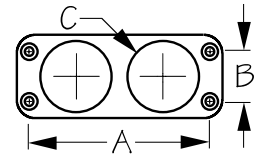

Bulk	Display	A	B	C	Color	Holes	Fastener	Wt.(lb.)	Std. Pack
426021	426021-1	1-7/8"	n/a	1-1/8"	Black	1	#8 FH	.02	10 ea
426022	426022-1	3-1/2"	1"	1-1/8"	Black	2	#8 FH	.05	10 ea
426023	426023-1	5-3/16"	1"	1-1/8"	Black	3	#8 FH	.07	10 ea

Front Load Power Socket Panels accommodate 1-1/8" diameter USB meters, gauges and standard power sockets. Constructed of injection-molded nylon. Power sockets not included.




Additional components not included



BACK MOUNT SOCKET PANEL

Injection-Molded Nylon



Bulk	Display	A	B	C	Color	Holes	Fastener	Wt.(lb.)	Std. Pack
426031	426031-1	1-7/8"	n/a	1-1/8"	Black	1	#8 FH	.02	10 ea
426032	426032-1	3-1/2"	1"	1-1/8"	Black	2	#8 FH	.05	10 ea
426033	426033-1	5-3/16"	1"	1-1/8"	Black	3	#8 FH	.07	10 ea

Back Mount Socket Panels accommodate 1-1/8" diameter USB meters, gauges and standard power sockets. Constructed of injection-molded nylon. Power sockets not included.



Additional components not included



TENT MOUNT SOCKET PANEL

Injection-Molded ABS




Bulk	Display	A	B	C	D	Holes	Fastener	Wt.(lb.)	Std. Pack
426027	426027-1	2-3/16"	3-3/16"	1-15/16"	1-1/8"	1	#6 FH	.05	10 ea
426028	426028-1	3-7/8"	3"	1-15/16"	1-1/8"	2	#6 FH	.10	10 ea
426029	426029-1	6"	3"	1-15/16"	1-1/8"	3	#6 FH	.15	10 ea

The Tent Mount Socket panel is used for under- and top-mount dash mounting when drilling a hole in the dash is neither practical or possible. Fits all Sea-Dog® round power sockets, gauges, and meters. Constructed of UV-stabilized injection-molded ABS. Installs with two #6 FH fasteners (not included). 1, 2 and 3 hole shells available.

⚠WARNING: Cancer and Reproductive Harm - www.P65Warnings.ca.gov



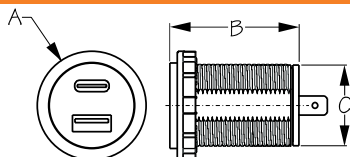

USB 3.0 & USB-C POWER SOCKET W/O LIGHT


Injection-Molded Nylon



Bulk	Display	A	B	C	Volts	Total Output	USB-C	USB-A	Wt.(lb.)	Std. Pack
426510	426510-1	1-7/16"	1-1/2"	1-1/8"	8-32	5V/6A	60W@24V	36W@12V	.08	10 ea

USB 3.0 & USB-C Power Socket charges two devices simultaneously. When split, the total 6A output is 3A per side. USB 3.0 features Quick Charging (QC) for supported devices, giving enough power to charge phones, pads, and tablets quickly and efficiently. USB-C features Power Delivery (PD) for faster and more flexible charging. Protective dust cap extends the life of the charger. Constructed of injection-molded nylon. Installation is as easy as drilling a 1-1/8" hole, inserting the socket body, tightening the locking nut, and connecting the wires. Also fits Sea-Dog® Power Socket Shell (426100) and Mounting Bracket (426105). Output DC: 5V/6A. Input: 8-32VDC. USB-C Watts: 60W@24V. USB 3.0 Watts: 36W@12V. Non-illuminating. IP65 rated with cover installed. CE, RoHS compliant.

▲WARNING: Cancer and Reproductive Harm - www.P65Warnings.ca.gov

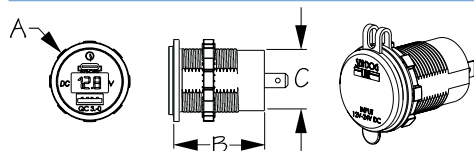

USB 3.0 & USB-C POWER SOCKET

WITH VOLTMETER


Injection-Molded Nylon



Bulk	Display	A	B	C	Volts	Total Output	USB-C Watts	USB 3.0 Watts	Wt.(lb.)	Std. Pack
426511	426511-1	1-7/16"	1-1/2"	1-1/8"	8-32	5V/6A	60W@24V	36W@12V	.08	5 ea

This USB 3.0 & USB-C Power Socket with Voltmeter charges two devices simultaneously while the LED screen displays voltage status. The total output 6A load is split 3A per side as needed. USB 3.0 features Quick Charging (QC) for supported devices, giving enough power to charge phones, pads, and tablets quickly and efficiently. USB-C features Power Delivery (PD) for faster and more flexible charging. Protective dust cap extends the life of the charger. LED volt meter reads voltage up to 14.6 volts. Constructed of injection-molded nylon. Installation is as easy as drilling a 1-1/8" hole, inserting the socket body, tightening the locking nut, and connecting the wires. Also fits Sea-Dog® Power Socket Shell (426100) and Mounting Bracket (426105). Output DC: 5V/6A. Input: 8-32VDC. USB-C Watts: 60W@24V. USB 3.0 Watts: 36W@12V. Blue LED display. IP65 rated with cover installed. CE, RoHS compliant.

▲WARNING: Cancer and Reproductive Harm - www.P65Warnings.ca.gov



SURFACE MOUNT - SQUARE USB 3.0 & USB-C POWER SOCKET


Injection-Molded Nylon



Bulk	Display	A	B	C	Volts	Total Output	USB-C	USB-A	Wt.(lb.)	Std. Pack
426531	426531-1	1-15/16"	1-15/16"	3/4"	8-32	5V/6A	60W@24V	36W@12V	.07	10 ea

This Square Surface Mount USB 3.0 & USB-C Power Socket charges two devices simultaneously. When split, the total 6A output is 3A per side. USB 3.0 features Quick Charging (QC) for supported devices, giving enough power to charge phones, pads, and tablets quickly and efficiently. USB-C features Power Delivery (PD) for faster and more flexible charging. Protective dust cap extends the life of the charger. Constructed of injection-molded nylon. Installation is as easy as drilling a 3/16" hole for the wire connection, secure to surface with two #6 screws (not included) and snapping concealed fastener cover in place. Output DC: 5V/6A. Input: 8-32VDC. USB-C Watts: 60W@24V. USB 3.0 Watts: 36W@12V. Blue LED illumination. IP65 rated with cover installed. CE, RoHS compliant.

▲WARNING: Cancer and Reproductive Harm - www.P65Warnings.ca.gov



SURFACE MOUNT - OVAL USB 3.0 & USB-C POWER SOCKET

Injection-Molded Nylon



Bulk	Display	A	B	C	Volts	Total Output	USB-C	USB-A	Wt.(lb.)	Std. Pack
426535	426535-1	2-3/8"	1-15/16"	3/4"	8-32	5V/6A	60W@24V	36W@12V	.07	10 ea

This Oval Surface Mount USB 3.0 & USB-C Power Socket charges two devices simultaneously. When split, the total 6A output is 3A per side. USB 3.0 features Quick Charging (QC) for supported devices, giving enough power to charge phones, pads, and tablets quickly and efficiently. USB-C features Power Delivery (PD) for faster and more flexible charging. Protective dust cap extends the life of the charger. Constructed of injection-molded nylon. Installation is as easy as drilling a 3/16" hole for the wire connection, secure to surface with two #6 screws (not included) and snapping concealed fastener cover in place. Output DC: 5V/6A. Input: 8-32VDC. USB-C Watts: 60W@24V. USB 3.0 Watts: 36W@12V. Blue LED illumination. IP65 rated with cover installed. CE, RoHS compliant.

▲WARNING: Cancer and Reproductive Harm - www.P65Warnings.ca.gov

NMEA Starter Kits

Available now!

Kickstart your NMEA project with ease!
Our new Starter Kits have everything
you need, all in one box.

820061-3
NMEA 2000 Single Starter Kit




NMEA 2000 MARINE CONNECTORS, CABLES & ACCESSORIES

Injection-Molded Nylon

Bulk	Display	Description	Wt.(lb.)	Std. Pack
820000	820000-1	Power T-Connector 0.3m	.05	5 ea
820003	820003-1	Front Mount Cable	.03	5 ea
820005	820005-1	Rear Mount Cable	.03	5 ea
820007	820007-1	Female Terminator	.01	5 ea
820009	820009-1	Male Terminator	.01	5 ea
820010	820010-1	Power Isolator	.03	5 ea
820014	820014-1	Blanking Cap, Female	.01	5 ea
820015	820015-1	Blanking Cap, Male	.01	5 ea
820016	820016-1	Through Bulkhead Adaptor	.02	5 ea
820019	820019-1	T-Connector-2 Way Cable	.08	5 ea
820020	820020-1	90° Elbow Connector	.02	5 ea
820021	820021-1	T-Connector-Single	.05	5 ea
820022	820022-1	T-Connector-2 Way	.07	5 ea
820023	820023-1	T-Connector-3 Way	.10	5 ea
820024	820024-1	T-Connector-4 Way	.13	1 ea
820025	820025-1	T-Connector-5 Way	.15	1 ea
820026	820026-1	T-Connector-6 Way	.18	1 ea
820031	820031-1	Backbone Cable, .5m (1.6')	.09	5 ea
820035	820035-1	Backbone Cable, 2m (6.5')	.70	5 ea
820037	820037-1	Backbone Cable, 5m (16')	.90	1 ea
820038	820038-1	Backbone Cable, 10m (32')	1.35	1 ea
820041	820041-1	Drop Cable, .5m (1.6')	.09	5 ea
820043	820043-1	Drop Cable, 1m (3.3')	.18	5 ea
820045	820045-1	Drop Cable, 2m (6.5')	.26	5 ea
820047	820047-1	Drop Cable, 5m (16')	.75	5 ea
n/a	820061-3	NMEA 2000 Single Starter Kit	1.70	1 ea
n/a	820062-3	NMEA 2000 Dual Starter Kit	1.80	1 ea
n/a	820063-3	NMEA 2000 Single w/Backbone Starter Kit	2.00	1 ea

NMEA 2000 Marine Connectors, Cables & Accessories, T and Elbow connectors from 1 to 6 ports. Backbone cables 1-1/2' to 32'; Drop Cables 1-1/2' to 16'; Rear Mount Cable, T-Connector Cables, Power Isolator, various caps and Bulkhead adapters.

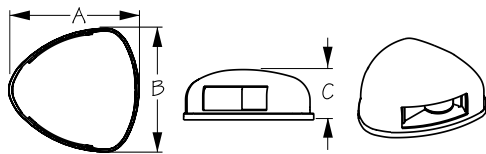

**C-5 COMBINATION BOW LED NAV LIGHT**

Stamped 316 Stainless/Injection-Molded ABS




Bulk	Display	A	B	C	Volts	ABYC C-5/A-16	Finish	Fastener	Wt.(lb.)	Std. Pack
401080	401080-1	2-3/16"	2"	1"	12	Yes	Stainless Steel	#8 RH	.13	1 ea
401081	401081-1	2-3/16"	2"	1"	12	Yes	Black	#8 RH	.13	1 ea

C-5 Combination Bow LED Nav Lights are constructed of Black ABS and available with a 316 Stainless cover. Installs with three #8 RH fasteners (not included). IP67 water resistant rating. 2 NM, ABYC C-5/A-16 Compliant. NMMA Type Accepted #2620316 with Stainless cover, Black version NMMA Type Accepted #2620317.

- Custom cover colors available with large orders

⚠WARNING: Cancer and Reproductive Harm - www.P65Warnings.ca.gov

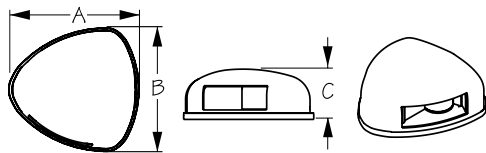**C-5 TOP-MOUNT SIDE LED NAV LIGHT**

Stamped 316 Stainless/Injection-Molded ABS




Bulk	Display	A	B	C	Volts	ABYC C-5/A-16	Finish	Fastener	Wt.(lb.)	Std. Pack
401087	401087-1	2-3/16"	2"	1"	12	Yes	Stainless Steel	#8 RH	.24	1 pr
401088	401088-1	2-3/16"	2"	1"	12	Yes	Black	#8 RH	.24	1 pr

C-5 Top-Mount Side LED Nav Lights are constructed of Black ABS and available with a 316 Stainless cover. Installs with three #8 RH fasteners (not included). IP67 water resistant rating. 2 NM, ABYC C-5/A-16 Compliant. NMMA Type Accepted #2620318 with Stainless cover, Black version NMMA Type Accepted #2620319.

- Custom cover colors available with large orders

⚠WARNING: Cancer and Reproductive Harm - www.P65Warnings.ca.gov

**C-5 SIDE-MOUNT SIDE LED NAV LIGHT**

Stamped 316 Stainless/Injection-Molded ABS



Bulk	Display	A	B	C	Volts	ABYC C-5/A-16	Finish	Fastener	Wt.(lb.)	Std. Pack
401091	401091-1	2-3/16"	1"	1"	12	Yes	Stainless Steel	#8 RH	.17	1 pr
401092	401092-1	2-3/16"	1"	1"	12	Yes	Black	#8 RH	.17	1 pr

C-5 Side-Mount Side LED Nav Lights are constructed of Black ABS and available with a 316 Stainless cover. Installs with two #8 RH fasteners (not included). IP67 water resistant rating. 2 NM, ABYC C-5/A-16 Compliant. NMMA Type Accepted #2620320 Stainless cover, Black version NMMA Type Accepted #2620321.

- Custom cover colors available with large orders

⚠WARNING: Cancer and Reproductive Harm - www.P65Warnings.ca.gov



NAVIGATE WITH CONFIDENCE

**VISIBLE TO
2NM**


**ABYC C-5/A-16
COMPLIANT**





FLUSH ROUND DOOR HINGE

Investment-Cast 316 Stainless Steel




Bulk	Display	A	B	C	D	E	Fastener	Wt.(lb.)	Std. Pack
205461	205461-1	3-1/4"	1-5/8"	1-5/8"	1-3/16"	3/16"	#10 FH	.16 / .32	10 ea / 10 pr

This Flush Door Hinge features a knuckle that sits below the mounting surface, creating a smooth, flat design perfect for deck surfaces or where lines might snag. In door applications, it fits flush with the frame and is completely invisible in the closed position giving cabinet fronts a sleek, clean look. 100° of motion. Ideal for recessed deck hatches or lids. Constructed of corrosion-resistant, investment-cast 316 stainless steel. Installs with four #10 FH fasteners (not included).

STUD MOUNT HANDRAIL

Formed 304 Stainless Steel/Black PVD Coating

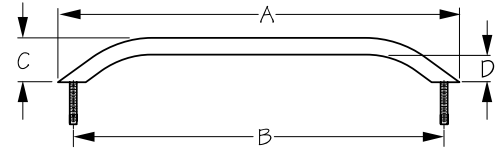


Bulk	Display	A	B	C	D	Finish	Tube O.D.	Fastener	Wt.(lb.)	Std. Pack
254601	254601-1	8-3/4"	7-1/2"	1-3/4"	1-1/4"	Stainless Steel	3/4"	5/16"-18 Nut	.33	5 ea
254603	254603-1	12"	10-3/4"	2"	1-1/4"	Stainless Steel	3/4"	5/16"-18 Nut	.46	5 ea
254607	254607-1	18-1/2"	16-3/4"	2"	1-1/4"	Stainless Steel	3/4"	5/16"-18 Nut	.64	5 ea
254609	254609-1	24"	22-1/2"	2"	1-1/4"	Stainless Steel	3/4"	5/16"-18 Nut	.80	5 ea
254611	254611-1	8-3/4"	7-1/2"	1-3/4"	1-1/4"	Black PVD	3/4"	5/16"-18 Nut	.33	5 ea
254613	254613-1	12"	10-3/4"	2"	1-1/4"	Black PVD	3/4"	5/16"-18 Nut	.46	5 ea
254617	254617-1	18-1/2"	16-3/4"	2"	1-1/4"	Black PVD	3/4"	5/16"-18 Nut	.64	5 ea
254619	254619-1	24"	22-1/2"	2"	1-1/4"	Black PVD	3/4"	5/16"-18 Nut	.80	5 ea

These Stud Mounted Handrails are designed to provide a sleek, smooth handrail transition to the mounting surface of your boat. Functional and attractive, with no visible mounting hardware. Features integral 5/16"-18 x 1-15/16" threaded studs. Constructed of corrosion-resistant formed 304 stainless steel. Also available in Black PVD finish. Installs with two 5/16"-18 nuts (included).

STUD MOUNT FLANGED HANDRAIL

Formed 304 Stainless Steel/Black PVD Coating



Bulk	Display	A	B	C	D	Finish	Tube O.D.	Fastener	Wt.(lb.)	Std. Pack
254620	254620-1	10"	8-3/4"	2-1/4"	1-1/2"	Stainless Steel	7/8"	5/16"-18 Nut	.44	5 ea
254622	254622-1	13-1/2"	12"	2-1/4"	1-1/2"	Stainless Steel	7/8"	5/16"-18 Nut	.53	5 ea
254626	254626-1	19-3/8"	18"	2-1/4"	1-1/2"	Stainless Steel	7/8"	5/16"-18 Nut	.70	5 ea
254628	254628-1	25-1/4"	24-1/4"	2-1/4"	1-1/2"	Stainless Steel	7/8"	5/16"-18 Nut	.76	5 ea
254630	254630-1	10"	8-3/4"	2-1/4"	1-1/2"	Black PVD	7/8"	5/16"-18 Nut	.44	5 ea
254632	254632-1	13-1/2"	12"	2-1/4"	1-1/2"	Black PVD	7/8"	5/16"-18 Nut	.53	5 ea
254636	254636-1	19-3/8"	18"	2-1/4"	1-1/2"	Black PVD	7/8"	5/16"-18 Nut	.70	5 ea
254638	254638-1	25-1/4"	24-1/4"	2-1/4"	1-1/2"	Black PVD	7/8"	5/16"-18 Nut	.76	5 ea


These Stud Mounted Flanged Handrails provide a larger mounting surface for greater stability. Functional and attractive, with no visible mounting hardware. Features integral 5/16"-18 x 1-5/8" threaded studs. Constructed of corrosion-resistant formed 304 stainless steel. Also available in Black PVD finish. Installs with two 5/16"-18 nuts (included).



OVAL FOLDING CLEAT W/HIDDEN HEX BOLTS

Investment-Cast Stainless 316/Black PVD Coating

PATENTED




Bulk	Display	A	B	C	D	E	F	Finish	Wt.(lb.)	Std. Pack
041115	041115-1	5"	4-5/8"	1-11/16"	1/2"	2-11/16"	1/4"-20 x 2" Hex Bolts	Stainless Steel	.29	10 ea
041115B	041115B-1	5"	4-5/8"	1-11/16"	1/2"	2-11/16"	1/4"-20 x 2" Hex Bolts	Black PVD	.29	10 ea

This Oval Folding Cleat with Hidden Hex Bolts feature an innovative patented design incorporating removable hex bolts vs. welded studs making bolt length choices easy for the customer. Incorporates a positive locking feature with audible click into the open/closed positions for easy rigging. Accommodates up to 1/2" line. Low-profile, ergonomic design makes for smooth, sleek appearance when closed, limiting trip hazards. Constructed of corrosion-resistant, investment-cast 316 stainless steel. Bulk cleats do not include fasteners. Display-packaged cleats (-1) include 2 hex bolts, 2 washers, and 2 nuts per cleat. Available in a highly polished Stainless Steel or Black PVD finish.

DARK FINISH PVD TECHNOLOGY



Sea-Dog's new Black PVD finish is a high-performance matte coating engineered to resist scratches, corrosion, and the harshest elements. Unlike traditional finishes that fade or chip over time, Physical Vapor Deposition (PVD) bonds at the molecular level, ensuring lasting beauty and resilience.




OVAL FOLDING CLEAT

Investment-Cast Stainless 316/Black PVD Coating

PATENTED

Bulk	Display	A	B	C	D	E	Fastener	Finish	Wt.(lb.)	Std. Pack
041125	041125-1	5"	4-5/8"	1-11/16"	1/2"	2-11/16"	1/4" FH	Stainless Steel	.29	10 ea
041125B	041125B-1	5"	4-5/8"	1-11/16"	1/2"	2-11/16"	1/4" FH	Black PVD	.29	10 ea

This Oval Folding Cleat incorporates a patented positive locking feature with audible click into the open/closed positions for easy rigging. Accommodates up to 1/2" line. Low-profile, ergonomic design makes for smooth, sleek appearance when closed, limiting trip hazards. Constructed of corrosion-resistant, investment-cast 316 stainless steel. Surface mounted: no cut-outs or hole saws required. Installs with two 1/4"-20 through bolts (not included). Available in a highly polished Stainless Steel or Black PVD finish.

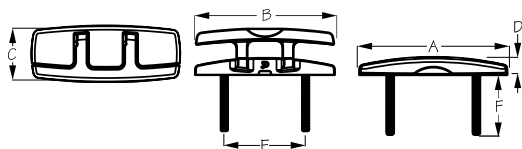

RECTANGULAR FOLDING CLEAT W/HIDDEN HEX BOLTS


Investment-Cast Stainless 316/Black PVD Coating

PATENTED

Bulk	Display	A	B	C	D	E	F	Finish	Wt.(lb.)	Std. Pack
041135	041135-1	4-9/16"	4-1/2"	1-11/16"	9/16"	2-11/16"	1/4"-20 x 2" Hex Bolts	Stainless Steel	.29	10 ea
041135B	041135B-1	4-9/16"	4-1/2"	1-11/16"	9/16"	2-11/16"	1/4"-20 x 2" Hex Bolts	Black PVD	.29	10 ea
041136	041136-1	6-1/16"	6"	2-3/16"	11/16"	3-1/2"	5/16"-18 x 2" Hex Bolts	Stainless Steel	.59	10 ea



This Rectangular Folding Cleat with Hidden Hex Bolts features an innovative patented design incorporating removable hex bolts vs. welded studs, making bolt length choices easy for the customer. Drain opening allows water and debris to pass through, reducing corrosion and wear to cleat. Incorporates a positive locking feature with audible click into the open/closed positions for easy rigging. Accommodates up to 1/2" line (4-1/2" cleat) or 5/8" line (6" cleat). Low-profile, ergonomic design makes for smooth, sleek appearance when closed, limiting trip hazards. Constructed of corrosion-resistant, investment-cast 316 stainless steel. Bulk cleats do not include fasteners. Display-packaged cleats (-1) include 2 hex bolts, 2 washers, and 2 nuts per cleat. Available in a highly polished Stainless Steel or Black PVD finish.



RECESSED ANCHOR POINT / HORIZONTAL

Investment-Cast 316 Stainless Steel

Bulk	Display	A	B	C	D	E	F	Fastener	Wt.(lb.)	Std. Pack
076102	076102-1	4"	1/8"	3/4"	3"	1-1/2"	2"	#10 FH	.23	5 ea



This Horizontal Recessed Anchor Point is designed to conveniently secure loads or attach tie-downs, cargo netting, twine, or rope. Good for light equipment use. Bolts securely and lays flush to the surface. Constructed of corrosion-resistant, investment-cast 316 stainless steel. Installs with two #10 FH fasteners (not included).






DAMPENING BUTT HINGE

Stamped 304 Stainless Steel/Black PVD Coating

PATENTED



Bulk	Display	A	B	C	D	E	Finish	Fastener	Wt.(lb.)	Std. Pack
203070	203070-1	1-1/4"	5/8"	5/8"	1-1/2"	1/16"	Stainless Steel	#8 FH	.03 / .06	10 ea / 10 pr
203071	203071-1	1-1/2"	3/4"	3/4"	2"	1/16"	Stainless Steel	#8 FH	.06 / .12	10 ea / 10 pr
203072	203072-1	2"	1"	1"	2"	1/16"	Stainless Steel	#8 FH	.07 / .14	10 ea / 10 pr
203077	203077-1	1-1/4"	5/8"	5/8"	1-1/2"	1/16"	Black PVD	#8 FH	.03 / .06	10 ea / 10 pr
203078	203078-1	1-1/2"	3/4"	3/4"	2"	1/16"	Black PVD	#8 FH	.06 / .12	10 ea / 10 pr
203079	203079-1	2"	1"	1"	2"	1/16"	Black PVD	#8 FH	.07 / .14	10 ea / 10 pr

These Dampening Butt Hinges consist of two rectangular leaves with a Teflon-coated pin that produces a very precise, low-friction movement for a high-end feel with anti-rattle properties. Designed to attach to abutting surfaces of a door and door jamb or to be mortised for a flush installation. Constructed of corrosion-resistant, stamped 304 stainless steel. Black versions are coated with durable PVD. Installs with four #8 FH fasteners (not included). Patent Pending.


⚠WARNING: Cancer and Reproductive Harm - www.P65Warnings.ca.gov



DAMPENING BUTT HINGE

Stamped 304 Stainless Steel/Black PVD Coating

PATENT PENDING



Bulk	Display	A	B	C	D	E	Finish	Fastener	Wt.(lb.)	Std. Pack
203080	203080-1	2"	1"	1"	3"	1/16"	Stainless Steel	#8 FH	.11 / .22	10 ea / 10 pr
203081	203081-1	3"	1-1/2"	1-1/2"	3"	1/16"	Stainless Steel	#8 FH	.16 / .32	10 ea / 10 pr
203088	203088-1	2"	1"	1"	3"	1/16"	Black PVD	#8 FH	.11 / .22	10 ea / 10 pr
203089	203089-1	3"	1-1/2"	1-1/2"	3"	1/16"	Black PVD	#8 FH	.16 / .32	10 ea / 10 pr

These Dampening Butt Hinges consist of two rectangular leaves with a Teflon-coated pin that produces a very precise, low-friction movement for a high-end feel with anti-rattle properties. Designed to attach to abutting surfaces of a door and door jamb or to be mortised for a flush installation. Constructed of corrosion-resistant, stamped 304 stainless steel. Black versions are coated with durable PVD. Installs with six #8 FH fasteners (not included). Patent Pending.


⚠WARNING: Cancer and Reproductive Harm - www.P65Warnings.ca.gov



DAMPENING SHORT SIDE DOOR HINGE

Stamped 304 Stainless Steel/Black PVD Coating

PATENT PENDING

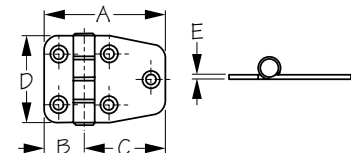

Bulk	Display	A	B	C	D	E	Finish	Fastener	Wt.(lb.)	Std. Pack
203510	203510-1	2-1/8"	11/16"	1-7/16"	1-1/2"	1/16"	Stainless Steel	#8 FH	.09 / .18	10 ea / 10 pr
203511	203511-1	2-1/8"	11/16"	1-7/16"	1-1/2"	1/16"	Black PVD	#8 FH	.09 / .18	10 ea / 10 pr

These Dampening Short Side Door Hinges consist of two leaves with a Teflon-coated pin that produces a very precise, low-friction movement for a high-end feel with anti-rattle properties, great for interior and exterior applications such as cabinets, hatches, folding tables, or seats where mounting space is tight. Constructed of corrosion-resistant, stamped 304 stainless steel. Black versions are coated with durable PVD. Installs with five #8 FH fasteners (not included). Patent Pending.


⚠WARNING: Cancer and Reproductive Harm - www.P65Warnings.ca.gov



DAMPENING OFFSET SHORT SIDE DOOR HINGE

Stamped 304 Stainless Steel/Black PVD Coating


PATENT PENDING

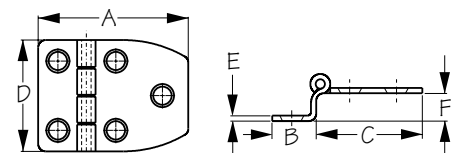

Bulk	Display	A	B	C	D	E	F	Finish	Fastener	Wt.(lb.)	Std. Pack
203512	203512-1	2-1/8"	5/8"	1-3/8"	1-1/2"	1/16"	3/8"	Stainless Steel	#8 FH	.10 / .20	10 ea / 10 pr
203513	203513-1	2-1/8"	5/8"	1-3/8"	1-1/2"	1/16"	3/8"	Black PVD	#8 FH	.10 / .20	10 ea / 10 pr

These Dampening Offset Short Side Door Hinges consist of two leaves with a Teflon-coated pin that produces a very precise, low-friction movement for a high-end feel with anti-rattle properties, great for interior and exterior applications such as cabinets, hatches, folding tables, or seats where mounting space is tight. Constructed of corrosion-resistant, stamped 304 stainless steel. Black versions are coated with durable PVD. Installs with five #8 FH fasteners (not included). Patent Pending.

⚠WARNING: Cancer and Reproductive Harm - www.P65Warnings.ca.gov

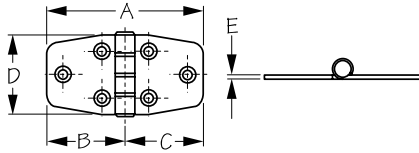**DAMPENING DOOR HINGE**

Stamped 304 Stainless Steel/Black PVD Coating


PATENT PENDING



Bulk	Display	A	B	C	D	E	Finish	Fastener	Wt.(lb.)	Std. Pack
203530	203530-1	2-7/8"	1-7/16"	1-7/16"	1-1/2"	1/16"	Stainless Steel	#8 FH	.11 / .22	10 ea / 10 pr
203539	203539-1	2-7/8"	1-7/16"	1-7/16"	1-1/2"	1/16"	Black PVD	#8 FH	.11 / .22	10 ea / 10 pr

These Dampening Door Hinges consist of two leaves with a Teflon-coated pin that produces a very precise, low-friction movement for a high-end feel with anti-rattle properties, great for interior and exterior applications such as cabinets, hatches, folding tables, or seats where mounting space is tight. Constructed of corrosion-resistant, stamped 304 stainless steel. Black versions are coated with durable PVD. Installs with six #8 FH fasteners (not included). Patent Pending.

▲WARNING: Cancer and Reproductive Harm - www.P65Warnings.ca.gov

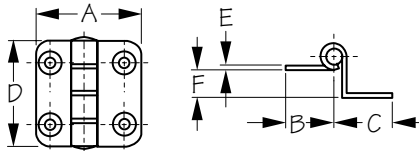**DAMPENING OFFSET BUTT HINGE**

Stamped 304 Stainless Steel/Black PVD Coating


PATENT PENDING



Bulk	Display	A	B	C	D	E	F	Finish	Fastener	Wt.(lb.)	Std. Pack
203590	203590-1	1-1/2"	3/4"	3/4"	1-1/2"	1/16"	3/8"	Stainless Steel	#8 FH	.09 / .18	10 ea / 10 pr
203599	203599-1	1-1/2"	3/4"	3/4"	1-1/2"	1/16"	3/8"	Black PVD	#8 FH	.09 / .18	10 ea / 10 pr

These Dampening Offset Butt Hinges consist of two leaves with a Teflon-coated pin that produces a very precise, low-friction movement for a high-end feel with anti-rattle properties, designed to be mounted on the front surface of a raised door with a 3/8" offset on one side. Constructed of corrosion-resistant, stamped 304 stainless steel. Black versions are coated with durable PVD. Installs with four #8 FH fasteners (not included). Patent Pending.

▲WARNING: Cancer and Reproductive Harm - www.P65Warnings.ca.gov

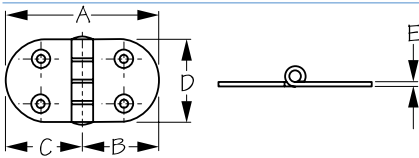**DAMPENING ROUND SIDE DOOR HINGE - SHORT**

Stamped 304 Stainless Steel/Black PVD Coating


PATENT PENDING



Bulk	Display	A	B	C	D	E	Finish	Fastener	Wt.(lb.)	Std. Pack
203700	203700-1	2-13/16"	1-7/16"	1-7/16"	1-1/2"	1/16"	Stainless Steel	#8 FH	.12 / .24	10 ea / 10 pr
203709	203709-1	2-13/16"	1-7/16"	1-7/16"	1-1/2"	1/16"	Black PVD	#8 FH	.12 / .24	10 ea / 10 pr

These Dampening Short Round Side Door Hinges consist of two leaves with a Teflon-coated pin that produces a very precise, low-friction movement for a high-end feel with anti-rattle properties, great for interior and exterior applications such as cabinets, hatches, folding tables, or seats where mounting space is tight. Constructed of corrosion-resistant, stamped 304 stainless steel. Black versions are coated with durable PVD. Installs with four #8 FH fasteners (not included). Patent Pending.

▲WARNING: Cancer and Reproductive Harm - www.P65Warnings.ca.gov

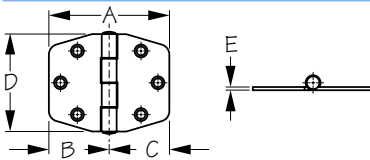**DAMPENING HEAVY DUTY HINGE**

Stamped 304 Stainless Steel/ Black PVD Coating

PATENT PENDING



Bulk	Display	A	B	C	D	E	Finish	Fastener	Wt.(lb.)	Std. Pack
203801	203801-1	2-7/8"	1-7/16"	1-7/16"	2-15/16"	1/16"	Stainless Steel	#8 FH	.22 / .44	10 ea / 10 pr
203809	203809-1	2-7/8"	1-7/16"	1-7/16"	2-15/16"	1/16"	Black PVD	#8 FH	.22 / .44	10 ea / 10 pr

These Dampening Heavy Duty Hinges consist of two leaves with a Teflon-coated pin that produces a very precise, low-friction movement for a high-end feel with anti-rattle properties, great for interior and exterior applications such as cabinets, hatches, folding tables, or seats where mounting space is tight. Constructed of corrosion-resistant, stamped 304 stainless steel. Black versions are coated with durable PVD. Installs with six #8 FH fasteners (not included). Patent Pending.


▲WARNING: Cancer and Reproductive Harm - www.P65Warnings.ca.gov



TRIPLE THREAT™ THREE POLE ROD HOLDER

Injection-Molded Polypropylene

PATENTED



Bulk	Display	A	B	C	D	E	F	Color	Wt.(lb.)	Std. Pack
325032	325032-1	13-1/2"	1-7/8"	1-3/4"	10-3/4"	7"	4-1/2"	White	.87 / .95	10 ea
325033	325033-1	13-1/2"	1-7/8"	1-3/4"	10-3/4"	7"	4-1/2"	Black	.87 / .95	10 ea
325034	325034-1	13-1/2"	1-7/8"	1-3/4"	10-3/4"	7"	4-1/2"	Flat Dark Earth	.87 / .95	10 ea


Our Triple Threat™ Three Pole Rod Holder is proudly made in the USA with recycled materials. Features the ability to hold bait, cast, and fly fishing rods/reels. These three-pole, side-mount rod holders come equipped with a built-in knife and plier storage with holders that can accommodate up to 16 different fishing lures. Several key features unique to our patented design include: Accessory Track Mounting System™, scent bottle storage, as well as four leash and two bungee cord attachment points. Accommodates rods up to 1-3/4" in diameter. Constructed of one-piece injection-molded, UV-stabilized polypropylene. No assembly required. Installs with four #8 fasteners (included in Display-packaged product). Available in Black, White, or FDE (Flat Dark Earth). This is a fisherman's dream and is a must have for any boat, kayak, or dock!

⚠WARNING: Cancer and Reproductive Harm - www.P65Warnings.ca.gov



LOW PROFILE POP-OUT DECK PLATE

Injection-Molded Polypropylene

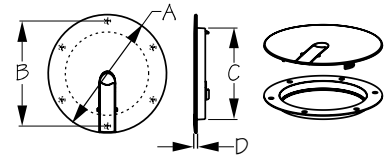

Bulk	Display	A	B	C	D	Color	Fastener	Wt.(lb.)	Std. Pack
336410	336410-1	6"	5-1/4"	4-1/8"	3/16"	White	#8 FH	.28	10 ea
336411	336411-1	6"	5-1/4"	4-1/8"	3/16"	Black	#8 FH	.28	10 ea
336412	336412-1	8"	7-1/4"	6-1/4"	3/16"	White	#8 FH	.58	10 ea
336413	336413-1	8"	7-1/4"	6-1/4"	3/16"	Black	#8 FH	.58	10 ea

The Low Profile Pop-Out Deck Plate features an integrated, pop-up lever to make opening and closing a snap. The concealed fasteners give a smooth look with a very low profile (.1875"), this deck plate is great for tight places and high traffic areas. Rubber O-ring provides a watertight seal and three tab snap provides a secure fit. Constructed of UV-resistant injection-molded Polypropylene for its structural strength. Installs with six #8 FH fasteners (not included). Available in black or white.




⚠WARNING: Cancer and Reproductive Harm - www.P65Warnings.ca.gov



FOLDING COAT HOOK

Investment-Cast 316 Stainless Steel

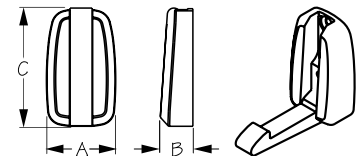

Bulk	Display	A	B	C	Fastener	Wt.(lb.)	Std. Pack
671497	671497-1	1-3/16"	9/16"	2"	#8 FH	.18	10 ea


Folds flat when not in use. Constructed of corrosion-resistant, investment-cast 316 stainless steel with rubber gasket. Installs with two #8 FH fasteners (not included).

⚠WARNING: Cancer and Reproductive Harm - www.P65Warnings.ca.gov



FENDER HOOK

Investment-Cast 316 Stainless Steel

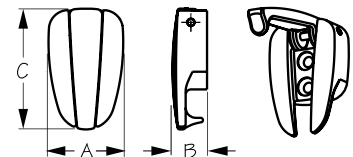


Bulk	Display	A	B	C	Line Size	Fastener	Wt.(lb.)	Std. Pack
672560	672560-1	1-1/4"	5/8"	2-1/16"	1/4"-3/8"	#8 FH	.24	10 ea

This Fender Hook can be used for quick and easy placement of fenders. Designed to be installed on the gunwale for use with up to 3/8" line. Spring-loaded hook keeps line captive against surface. Constructed of corrosion-resistant, investment-cast 316 stainless steel with rubber gasket. Installs with two #8 FH fasteners (not included).

⚠WARNING: Cancer and Reproductive Harm - www.P65Warnings.ca.gov



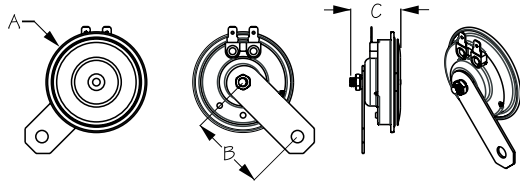

MINI COMPACT LOW-TONE HORN W/ BRACKET

Powder-Coated Steel/304 Stainless Steel



Bulk	Display	Amps	dB	Frequency (Hz)	A	B	C	Wt.(lb.)	Std. Pack
431431	431431-1	4	111	330±20	2-13/16"	2-3/16"	1-7/16"	.35	12 ea / 6 ea



At 111 decibels and a frequency (Hz) of 330±20A, this Mini Compact Low-Tone Horn meets US Coast Guard's COLREGS and ABYC standard A-23 for use on vessels under 12m (39'). Constructed of powder-coated steel with corrosion-resistant 304 stainless steel bracket for easy mounting. Recommended for freshwater use. NMMA Type Accepted #2601746. 12VDC.

⚠WARNING: Cancer and Reproductive Harm - www.P65Warnings.ca.gov

HEAR THE
DIFFERENCE



SCAN TO LISTEN



POP-UP SINK STOPPER


Rubber Santoprene



Bulk	Display	A	B (Drain)	C	Size	Wt.(lb.)	Std. Pack
n/a	517395-1	1-15/16"	1-1/4"	3/4"	Small	.01	10 ea
n/a	517397-1	2-7/16"	1-1/2"	1"	Large	.02	10 ea

Unique design offers plug and drain in one product, simply install stopper to plug drain and press top to instantly activate drain without ever removing plug. Great for Boats, RVs or any 1-1/4" to 1-1/2" drains. Available in Small or Large diameters.

⚠WARNING: Cancer and Reproductive Harm - www.P65Warnings.ca.gov



THRU-HULL WITH STAINLESS CAP


Injection-Molded Polypropylene/Stamped 304 Stainless Steel



Bulk	Display	A	B	C	D	E	F	Finish	Wt.(lb.)	Std. Pack
520820	n/a	1-7/8"	7/8"	1-3/4"	3-3/8"	1-3/16"	5/8"	Stainless Steel	.07	10 ea
520821	n/a	1-7/8"	7/8"	1-3/4"	3-3/8"	1-3/16"	3/4"	Stainless Steel	.07	10 ea
520822	n/a	1-7/8"	7/8"	1-3/4"	3-3/8"	1-3/16"	1"	Stainless Steel	.10	10 ea
520823	n/a	1-7/8"	7/8"	1-3/4"	3-3/8"	1-3/16"	1-1/8"	Stainless Steel	.12	10 ea
520825	n/a	2-3/8"	1-1/8"	1-7/8"	4"	1-9/16"	1-1/2"	Stainless Steel	.23	10 ea

Thru-Hulls feature Polypropylene bodies with 304 stainless caps. Designed to allow water to pass in or out of a vessel. For use with hose for drainage above the water line. Constructed of injection-molded polypropylene and 304 stamped stainless steel. Great in conjunction with Dripper Guards® by Sea-Dog.

⚠WARNING: Cancer and Reproductive Harm - www.P65Warnings.ca.gov

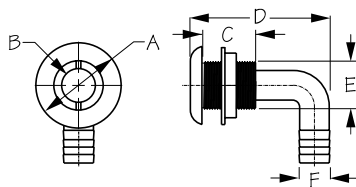

90° THRU-HULL WITH STAINLESS CAP

Injection-Molded Polypropylene/Stamped 304 Stainless Steel




Bulk	Display	A	B	C	D	E	F	Finish	Wt.(lb.)	Std. Pack
520830	n/a	1-7/8"	7/8"	1-13/16"	3-7/16"	1-15/16"	5/8"	Stainless Steel	.07	10 ea
520831	n/a	1-7/8"	7/8"	1-13/16"	3-7/16"	1-15/16"	3/4"	Stainless Steel	.08	10 ea
520832	n/a	1-7/8"	7/8"	1-13/16"	3-3/4"	1-15/16"	1"	Stainless Steel	.10	10 ea
520833	n/a	1-7/8"	7/8"	1-13/16"	3-3/4"	1-15/16"	1-1/8"	Stainless Steel	.12	10 ea
520835	n/a	2-3/8"	1-1/8"	1-13/16"	4-5/16"	1-9/16"	1-1/2"	Stainless Steel	.23	10 ea

90° Thru-Hulls feature Polypropylene bodies with 304 stainless caps. Designed to allow water to pass in or out of a vessel. For use with hose for drainage above the water line. Constructed of injection-molded polypropylene and 304 stamped stainless steel. Great in conjunction with Dripper Guards® by Sea-Dog.

⚠WARNING: Cancer and Reproductive Harm - www.P65Warnings.ca.gov

DRIPPER GUARD® 3M® BY SEA-DOG® ADHESIVE STAIN GUARD

Nitrile-Buna Rubber



Bulk	Display	A	Pack Qty.	Color	Wt.(lb.)	Std. Pack
520840	520840-1	Up To 1-7/8"	1	White	.02	10 ea
520841	520841-1	Up To 1-7/8"	1	Black	.02	10 ea
520842	520842-1	Up To 2-5/8"	1	White	.02	10 ea
520843	520843-1	Up To 2-5/8"	1	Black	.02	10 ea
n/a	520846-1	Up To 1-7/8"	3	White	.02	10 set
n/a	520847-1	Up To 1-7/8"	3	Black	.06	10 set
n/a	520848-1	Up To 2-5/8"	3	White	.06	10 set
n/a	520849-1	Up To 2-5/8"	3	Black	.06	10 set


Dripper Guard® 3M® by Sea-Dog® Adhesive Stain Guard stops ugly black streaks from staining the side of your boat. Easy do-it-yourself installation, simple prep-peel backing and press along the bottom edge of your thru-hull. Patented channel design redirects water out and away from the hull, preventing drips down the side and eliminating stains and water sediment buildup.

⚠WARNING: Cancer and Reproductive Harm -
www.P65Warnings.ca.gov



DRIPPER GUARD® PRO BY SEA-DOG®

Nitrile-Buna Rubber

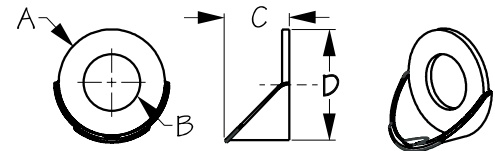

Bulk	Display	A	B	C	Color	Wt.(lb.)	Std. Pack
520850	520850-1	1-7/8"	1"	1-15/16"	Black	.02	10 ea
520851	520851-1	1-7/8"	3/4"	1-15/16"	White	.02	10 ea
520852	520852-1	1-7/8"	3/4"	1-15/16"	Black	.02	10 ea
520853	520853-1	1-7/8"	1-1/8"	1-15/16"	White	.02	10 ea
520854	520854-1	1-7/8"	1-1/8"	1-15/16"	Black	.02	10 ea


Dripper Guard® by Sea-Dog® Thru-Hull with Stainless Cap features a Polypropylene body with an investment-cast 316 stainless cap for a high-end appearance. Designed to keep your boat looking beautiful by protecting it from unsightly water stains. Available in various common hose sizes. For drainage above the water line. 520863B has black, PVD-coated 316 stainless cap.

⚠WARNING: Cancer and Reproductive Harm - www.P65Warnings.ca.gov



DRIPPER GUARD® BY SEA-DOG® THRU-HULL

Injection-Molded Polypropylene/316 Stainless Steel/Black PVD Coating

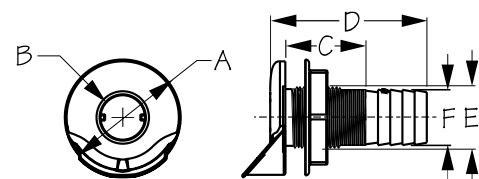

Bulk	Display	A	B	C	D	E	F	Finish	Wt.(lb.)	Std. Pack
520860	n/a	1-7/8"	7/8"	1-3/4"	3-3/8"	1-3/16"	5/8"	Stainless Steel Cap/Black Body	.10	10 ea
520861	n/a	1-7/8"	7/8"	1-3/4"	3-3/8"	1-3/16"	3/4"	Stainless Steel Cap/Black Body	.10	10 ea
520862	n/a	1-7/8"	7/8"	1-3/4"	3-3/8"	1-3/16"	1"	Stainless Steel Cap/Black Body	.13	10 ea
520863	n/a	1-7/8"	7/8"	1-3/4"	3-3/8"	1-3/16"	1-1/8"	Stainless Steel Cap/Black Body	.15	10 ea
520863B	n/a	1-7/8"	7/8"	1-3/4"	3-3/8"	1-3/16"	1-1/8"	Black PVD Cap/Black Body	.15	10 ea

Dripper Guard® by Sea-Dog® Thru-Hull features a Polypropylene body with an investment-cast 316 stainless steel cap for a high-end appearance. Designed to keep your boat looking beautiful by protecting it from unsightly water stains. Available in various common hose sizes. Also available with Black PVD cap. For drainage above the water line.

⚠WARNING: Cancer and Reproductive Harm - www.P65Warnings.ca.gov



FROM BOW TO STERN WE'VE GOT THE HARDWARE

For over a century, Sea-Dog Marine has delivered hardware you can trust, built on generations of proven craftsmanship. From dock to deck, our products are engineered for durability, reliability, and life on the water.

When it matters most, choose hardware rooted in history and proven at sea.



View the
full range
of Sea-Dog
Marine Hardware

Sea-Dog® Marine
Proven on the Water

SEA-DOG.COM



PO Box 479
Everett, WA 98206



425-259-0194



425-339-1345



Sea-Dog.com

*** PRINTED IN THE USA ***



SEA-DOG
MARINE