# Sea-Dog Battery Test Switch #422020-1 Installation Instructions

12 VOLT 10 AMPS PER PANEL O.D.: 2-1/2" x 3-1/4"

1. Connect the red wire from terminal (1) on the rocker switch to terminal (1) on the battery selection switch, if so equipped, or to the positive terminal on 12 volt battery (1).
2. Connect the red wire from terminal (2) on the rocker switch to terminal (2) on the battery selection switch, if so equipped, or to the positive terminal on 12 volt battery (2).
3. Connect the black wire with protective tubing from the meter to the common ground of the boat, to which the negative terminals on both batteries are also connected. Handle this wire carefully since the soldered connections are fragile.

Note: The meter can be adjusted by removing the tape on the back and moving the needle to the center of the red at 12.8 volts.

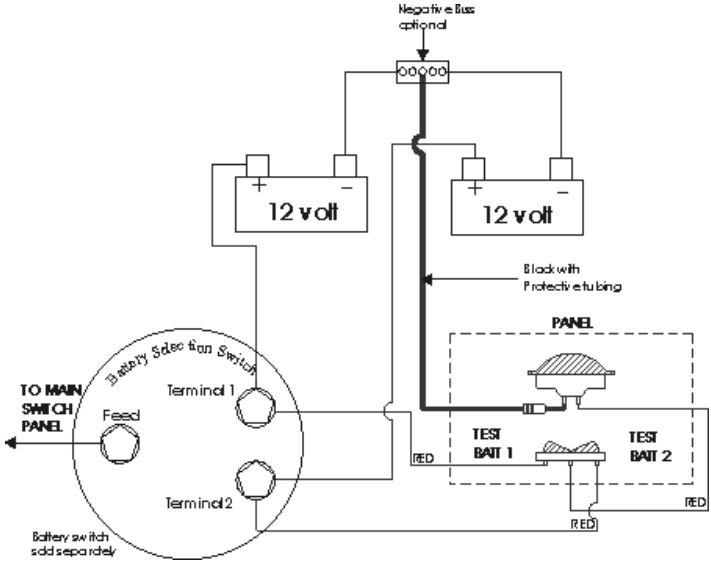


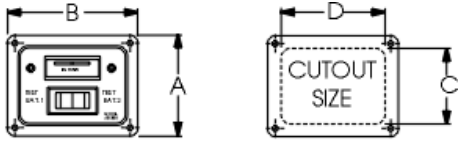


A - 2-1/2"  C - 1-3/4"