


# Sea-Dog Bilge Water Alarm

## Model #423033

### Installation Instructions

An additional float switch must be installed to activate the alarm on this panel (this float switch is in addition to the existing float switch which activates the bilge pump). This additional float switch activates the alarm on this panel only; it does not activate the bilge pump. The float switch that you are installing to activate the alarm should be mounted approximately 8 inches above the existing float switch that operates the bilge pump. A two conductor electrical cable (minimum #16 gauge marine grade electrical wire) should then be routed then from second float switch to the location on the Bilge Water Alarm Panel.

Connect wiring on back of Bilge Water Alarm Panel as follows:

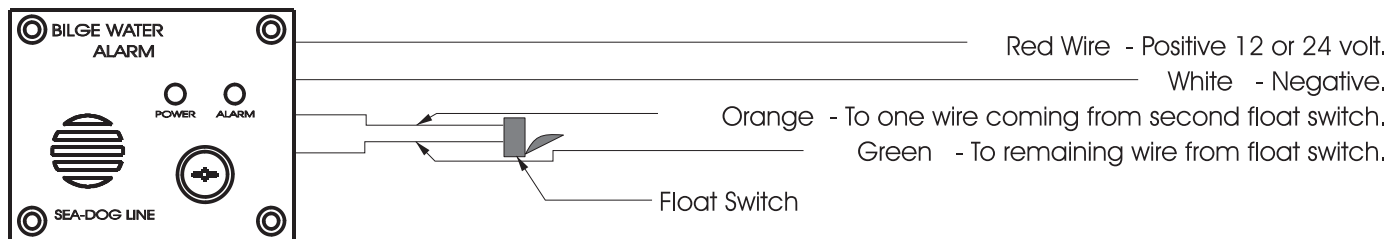

The alarm should be tested by manually causing the additional float switch to rise, therefore setting off the alarm.

**SEA-DOG**  
**LINE**®

MARINE & RIGGING HARDWARE

#423033

P.O. BOX 479 EVERETT, WA 98206